


**GARMIN**

CORPORATE DISPLAY

P12674 | 19/11/2024

CTU + ILLUMINATED HEADER  
+ PLATIUM POSTS

**TOOLS REQUIRED – SUPPLIED**




4MM ALLEN KEY

**Parts**


(A) X1

400MM

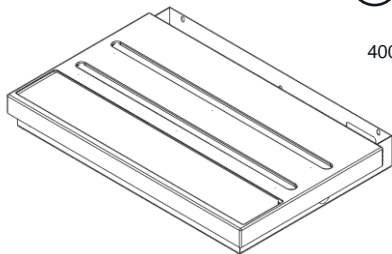


(B) X1

400MM



(D) X5

**PLATIUM**  
SECURITY  
POSTS  
(PRE-FITTED)




(C) X1



(E) X5

M6X8MM  
SCREW




(F) X1

Remote Control (to work with  
Access Control Remote Module)




AS33X


**1**

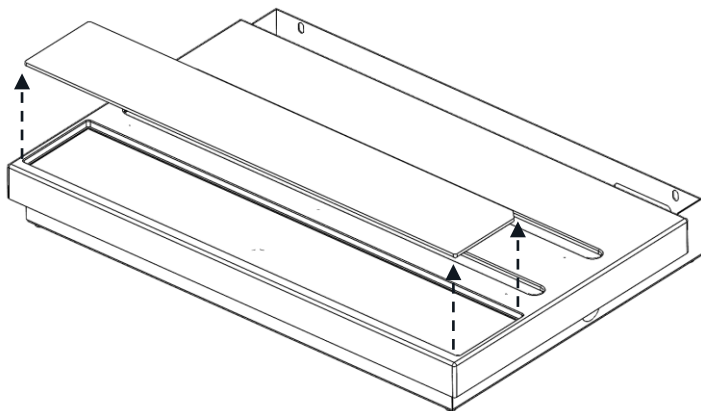


**2**

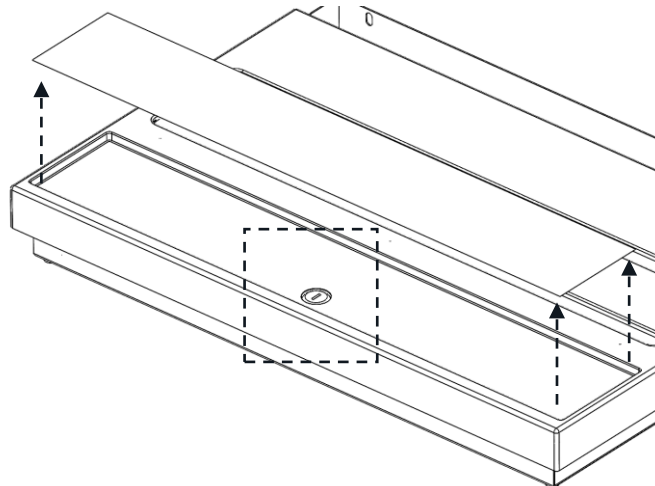


**3**

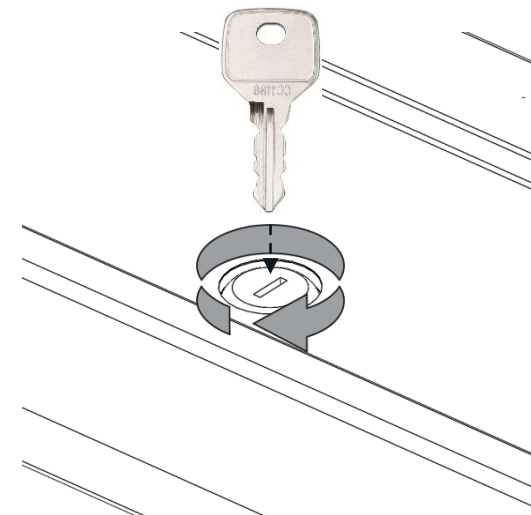

**4**

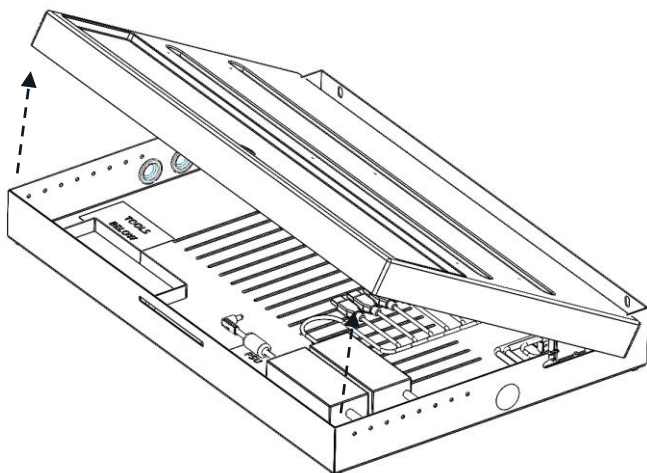


**5**

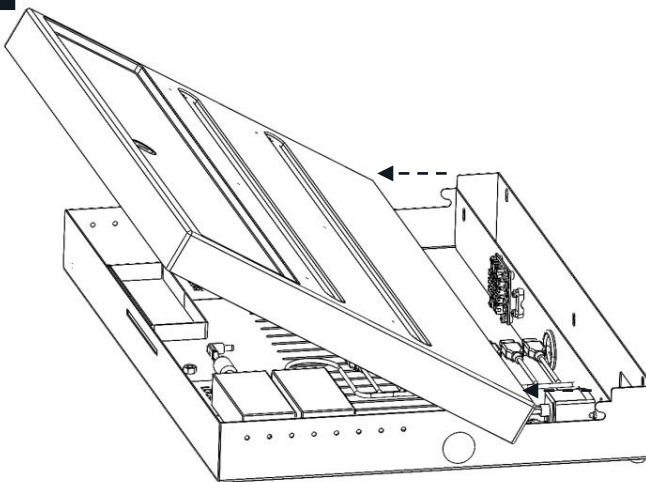


**6**



MUST TWIST LOCKING PLATES  
TO HOLD TOP SURFACE IN  
POSITION  
(REPEAT BOTH SIDES)



2X

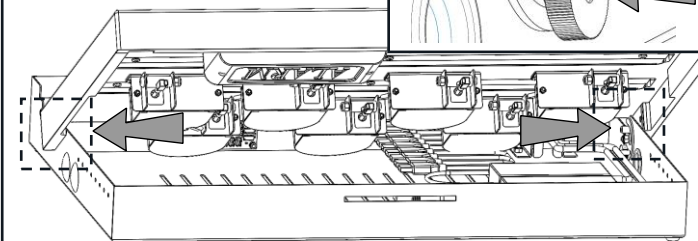


**GARMIN®**

7




RED SUPPORT ARM MUST BE SWUNG INTO POSITION TO SUPPORT TOP PLATE

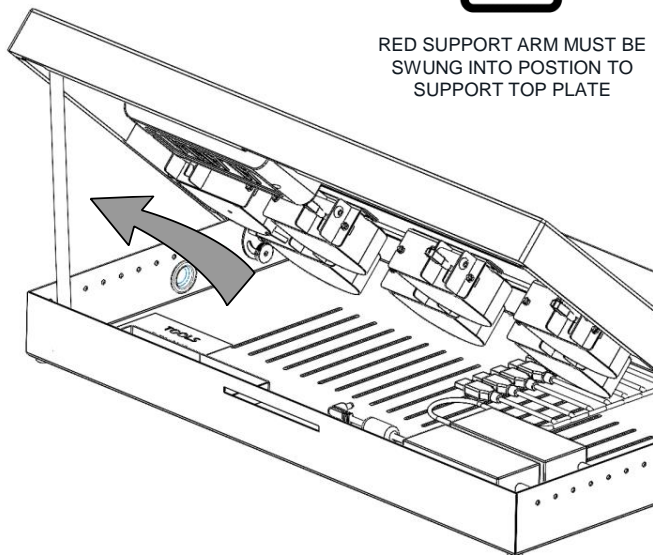


8

IEC PLUG COMING FROM MAIN POWER LOOM ON CTU SECTION

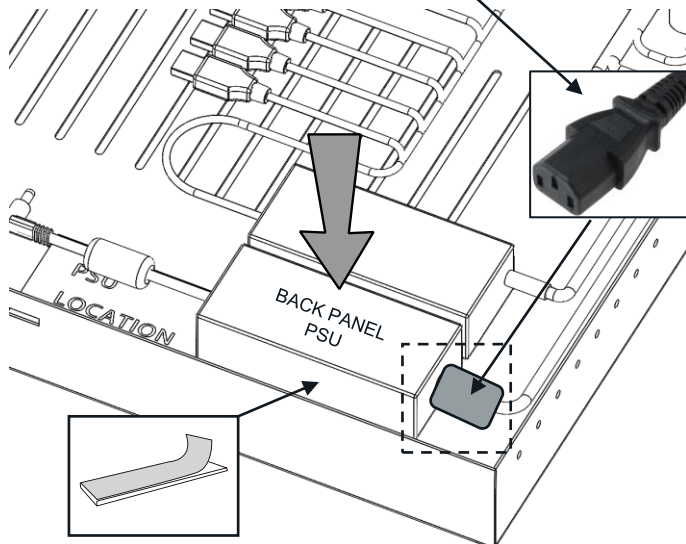


9

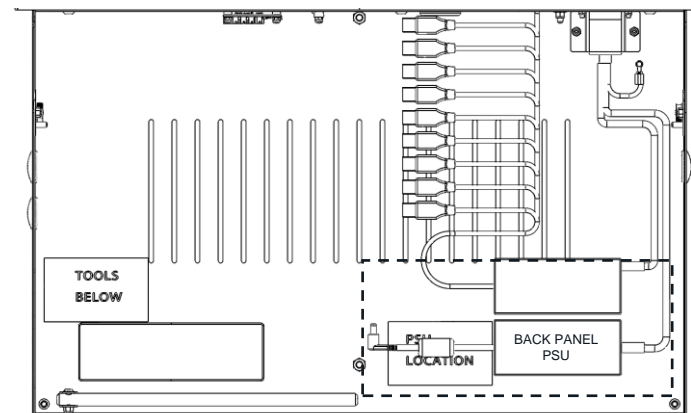


PSUs MUST BE FITTED INTO THIS AREA INSIDE THE DISPLAY

10

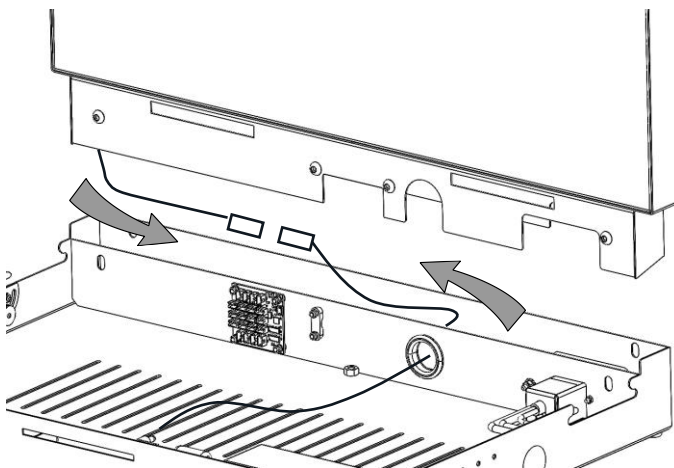


11


(B) X1

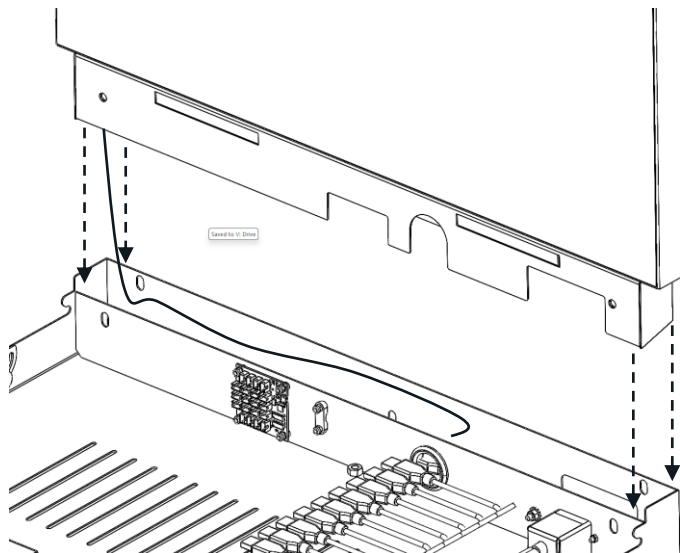

12

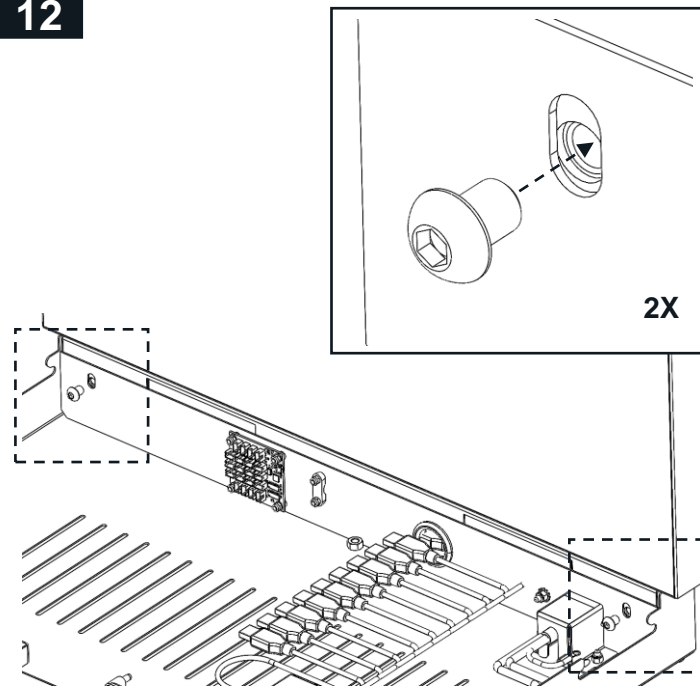


13

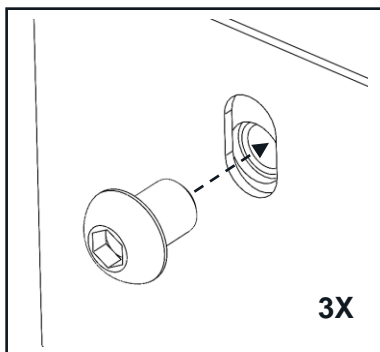


3X


14

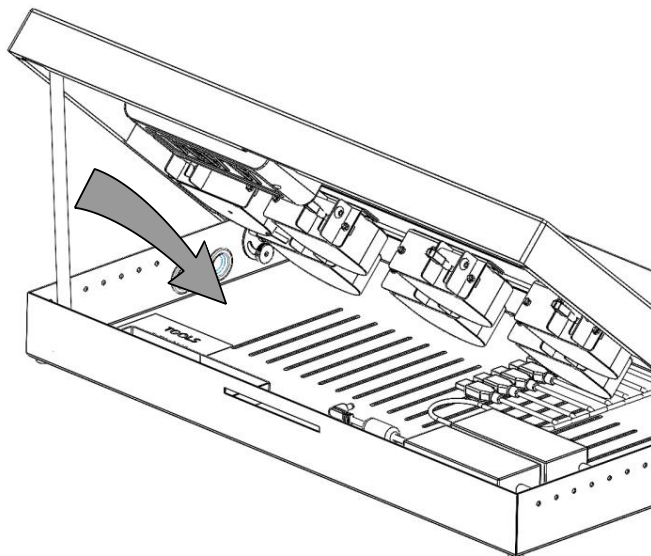


15




2X

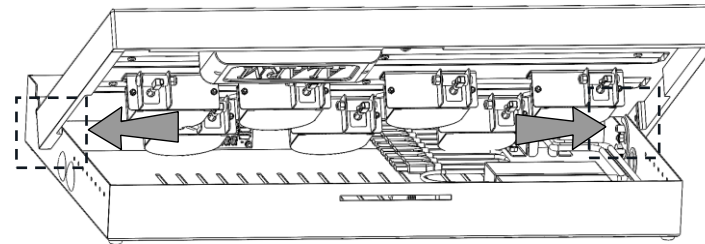


16

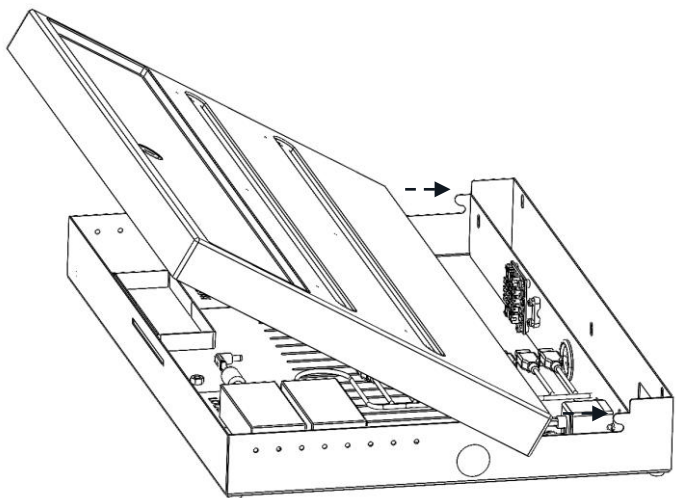


17

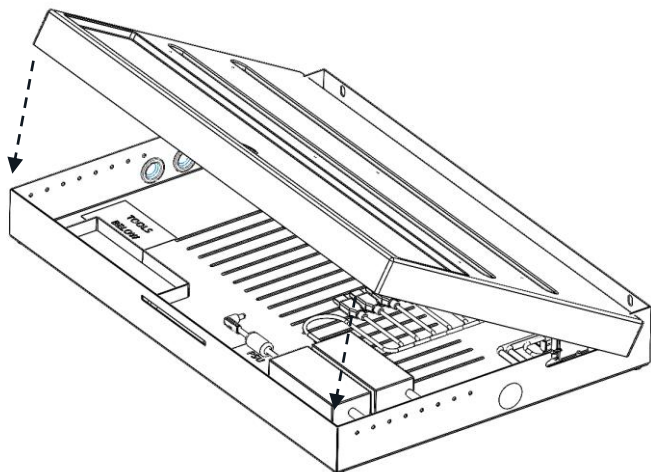


18

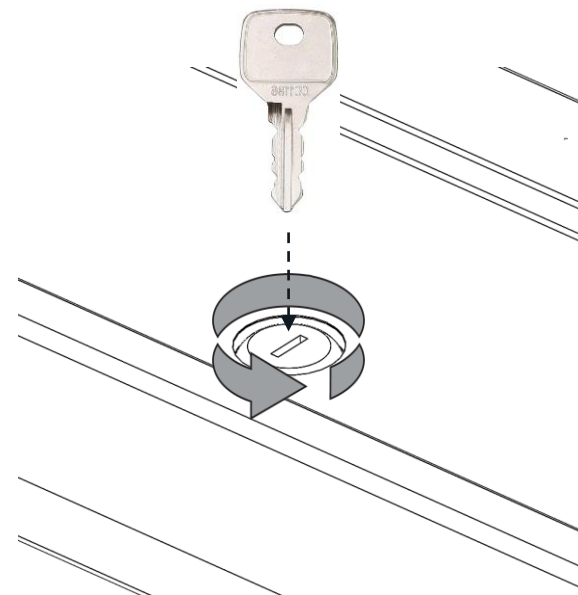



19

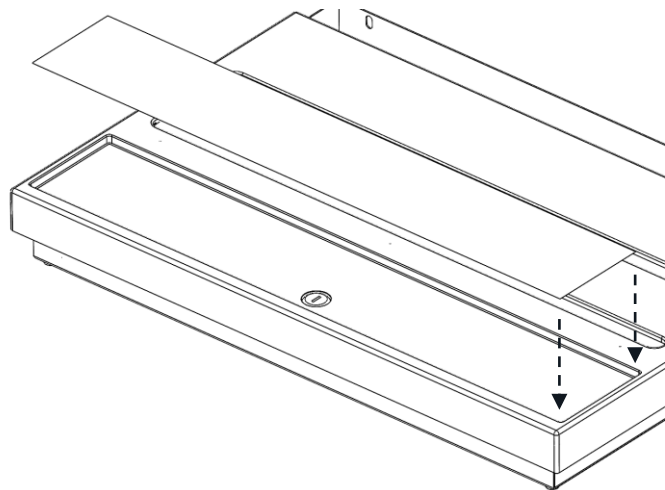

20






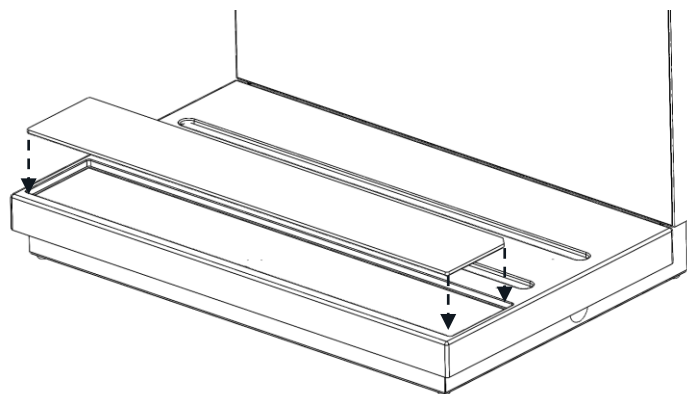


21

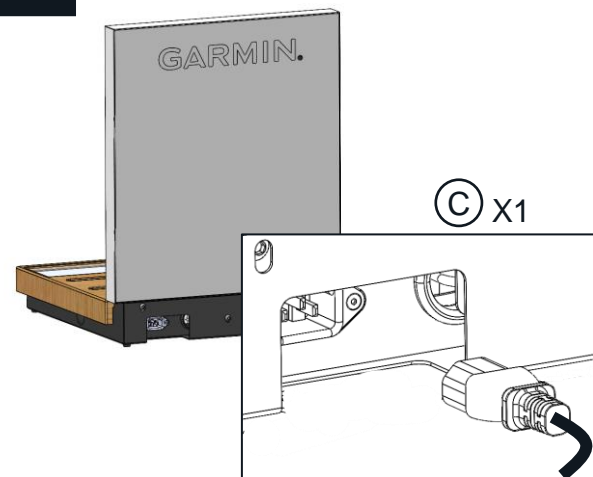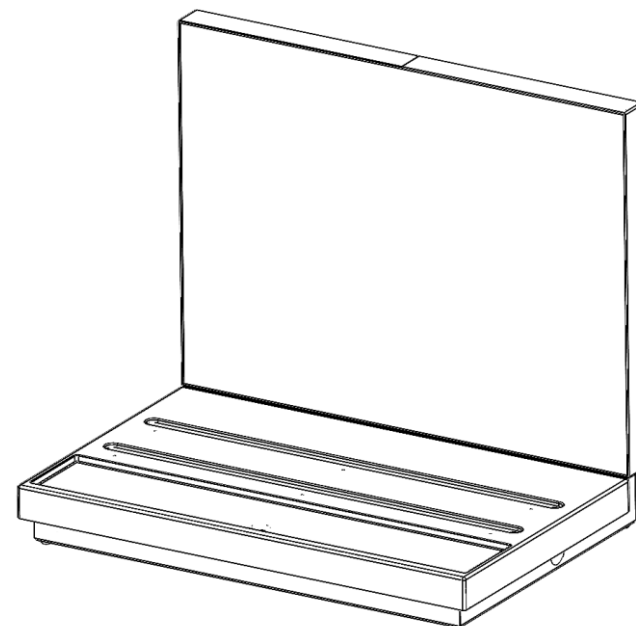




## Fitting security to your CTU

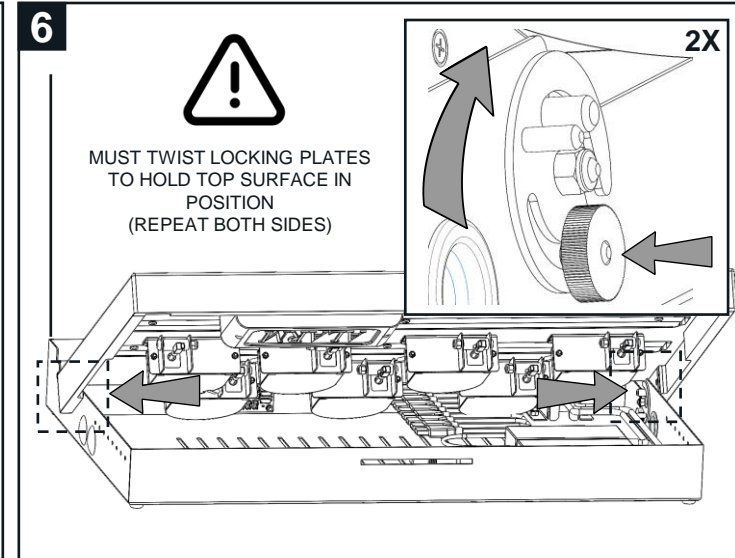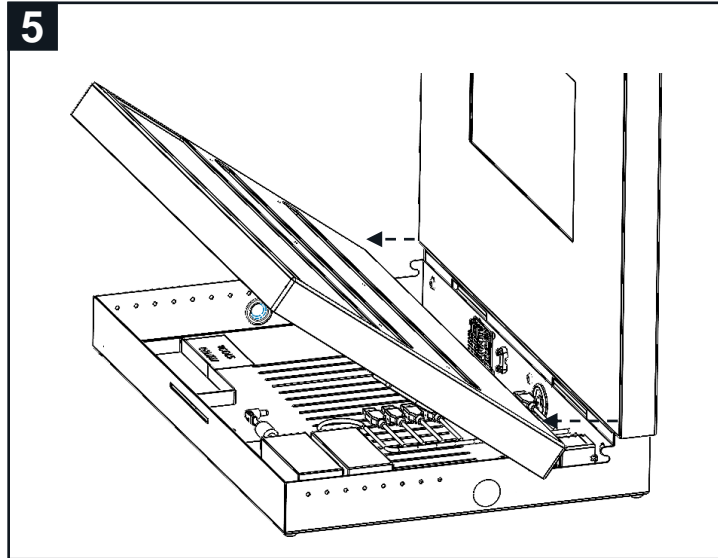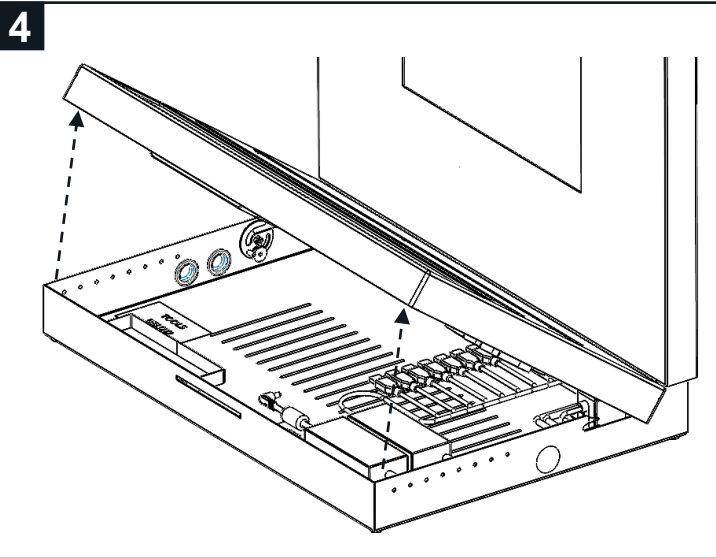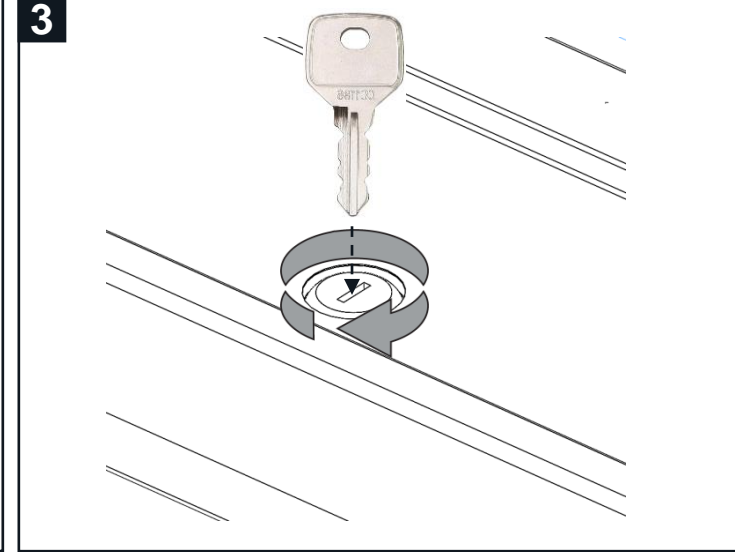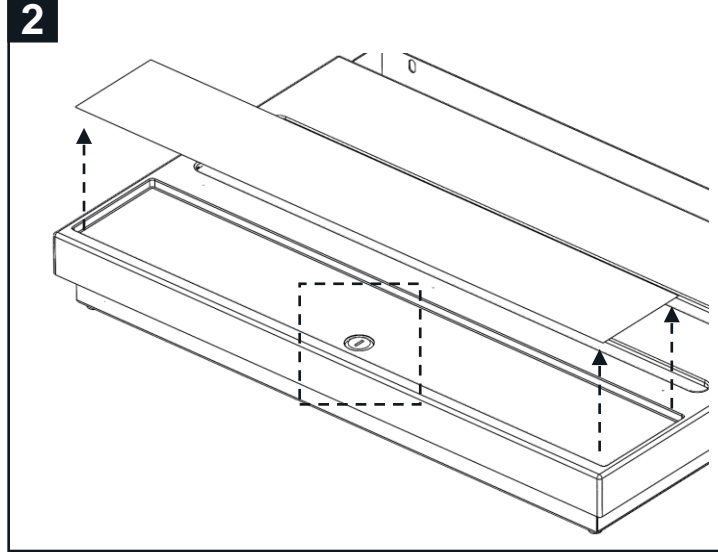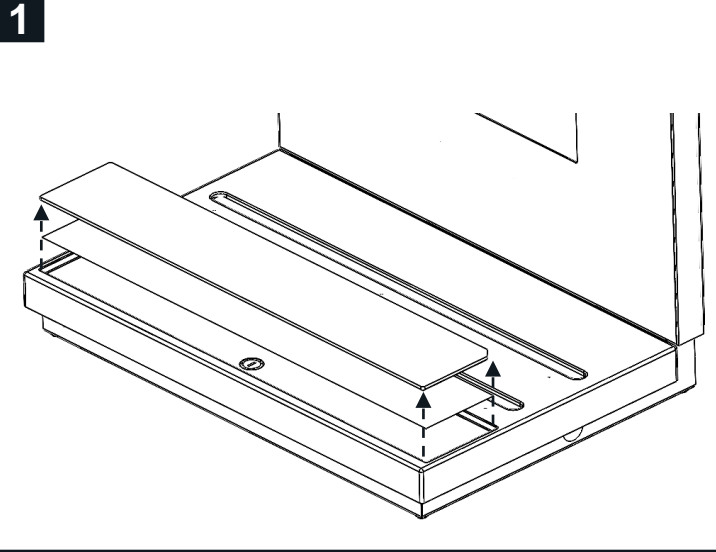

7



RED SUPPORT ARM MUST BE  
SWUNG INTO POSITION TO  
SUPPORT TOP PLATE

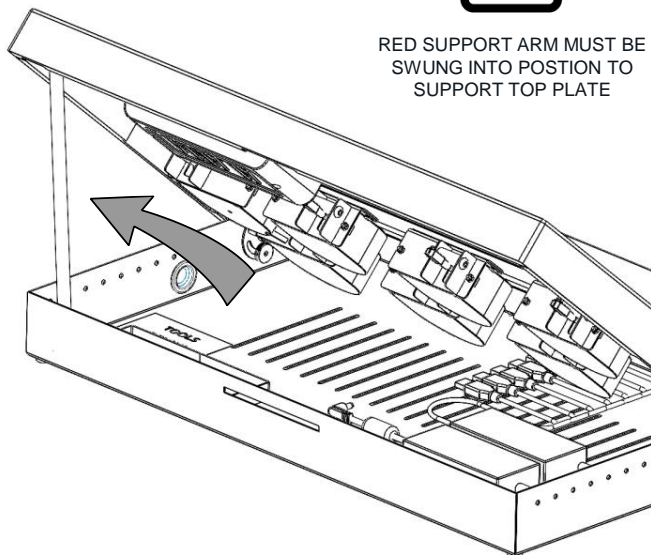


8




D X1

ALARM UNIT

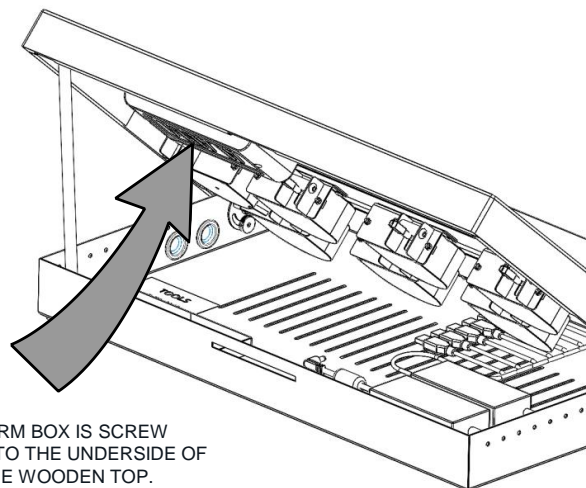


ALARM BOX IS SCREW  
FITTED TO THE UNDERSIDE OF  
THE WOODEN TOP.



9

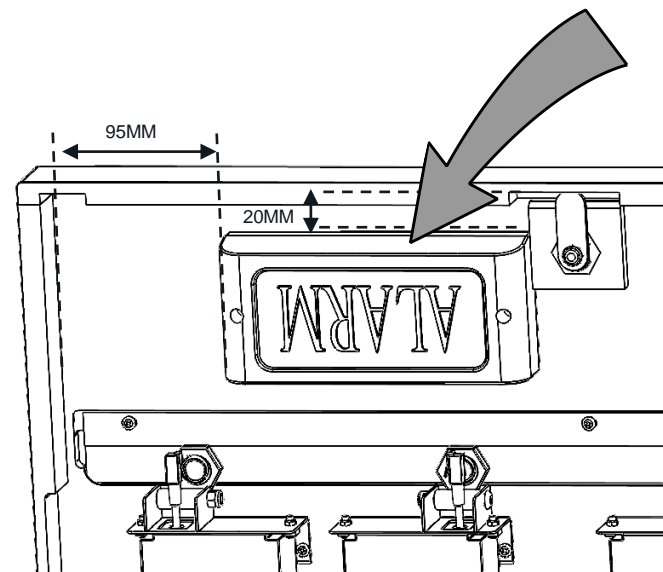


10

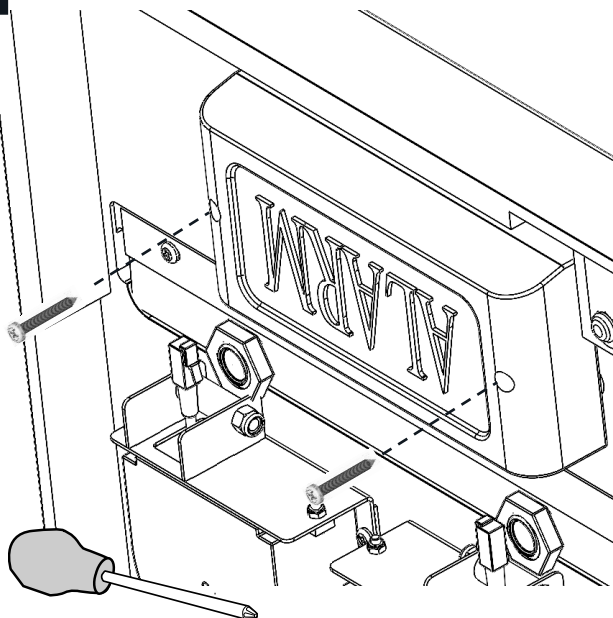

11

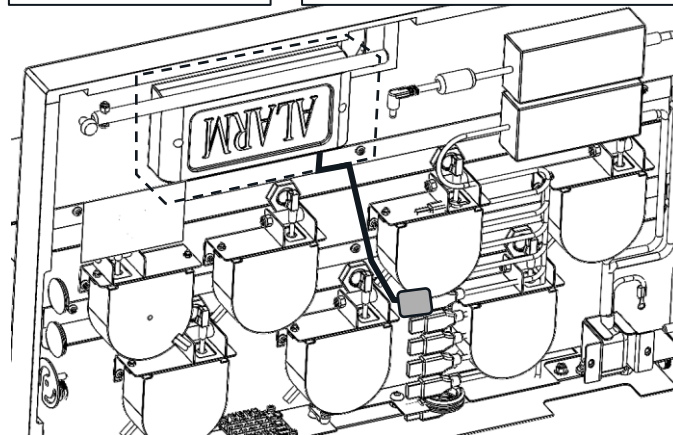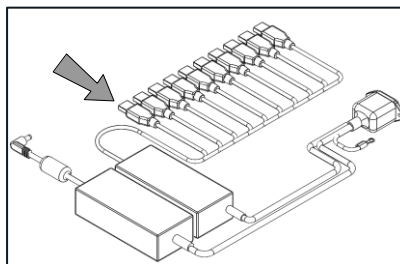


12

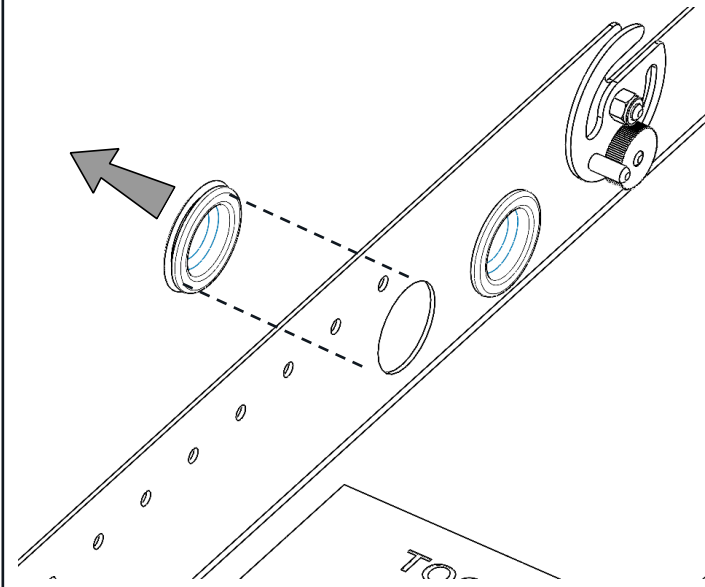

13


© X1

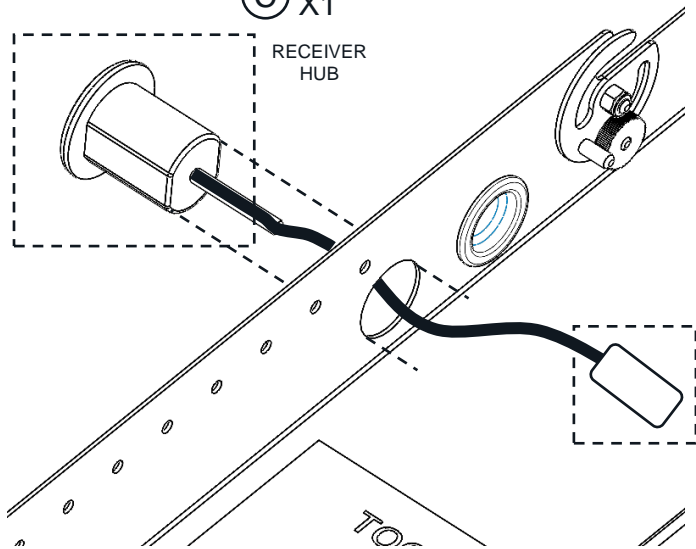RECEIVER  
HUB


14



15

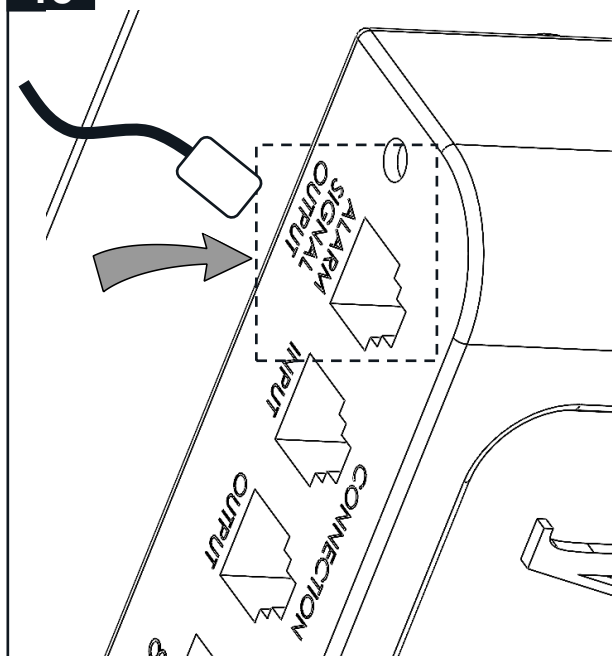


16

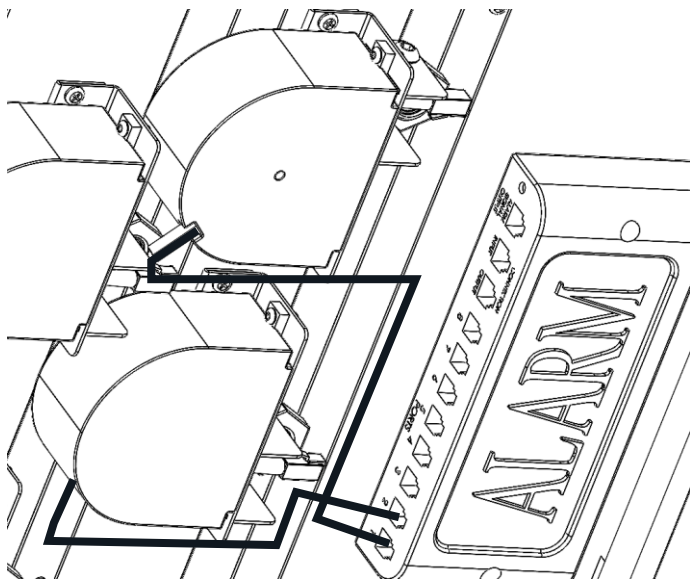

17




18

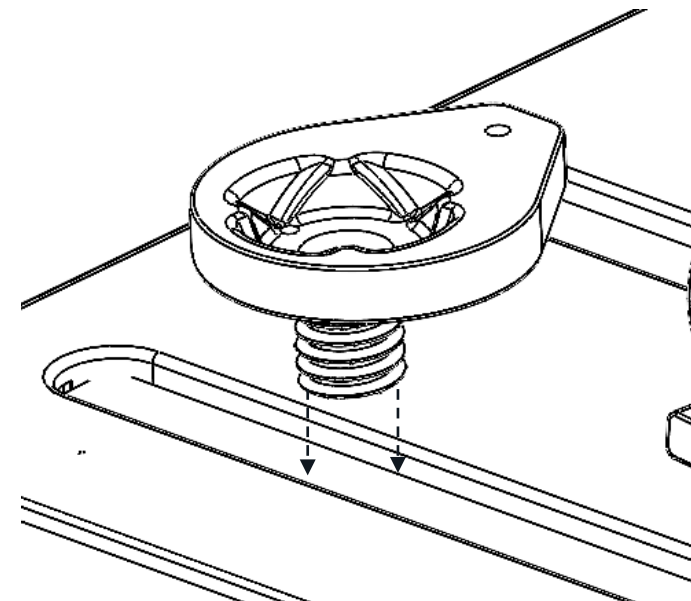





19

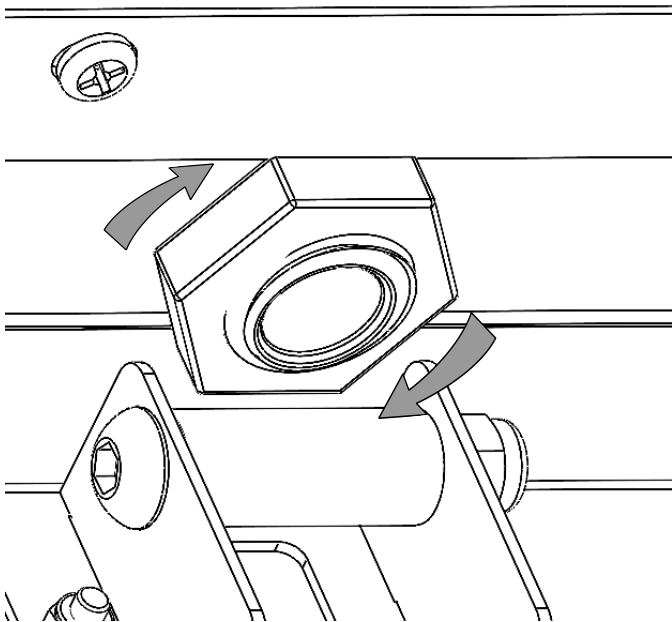


20

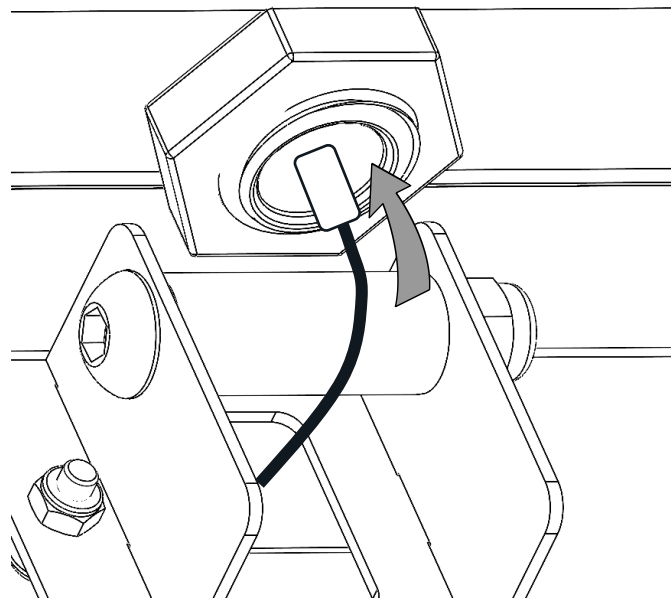


21

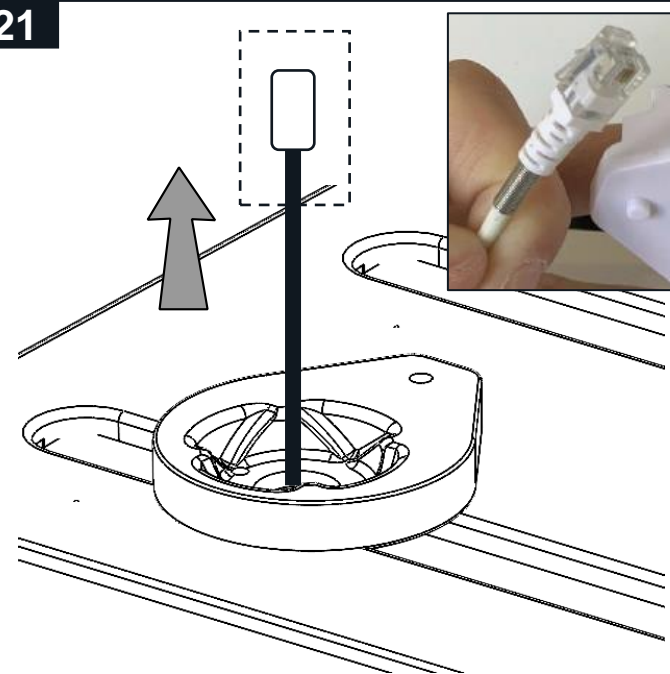


22

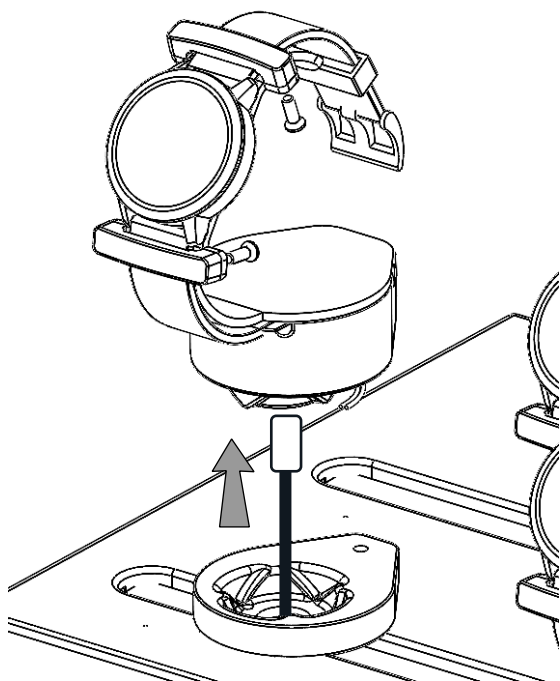

23

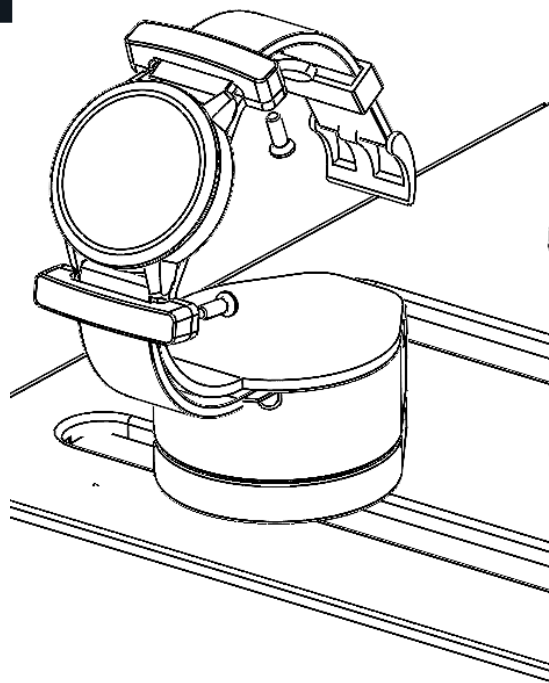


24

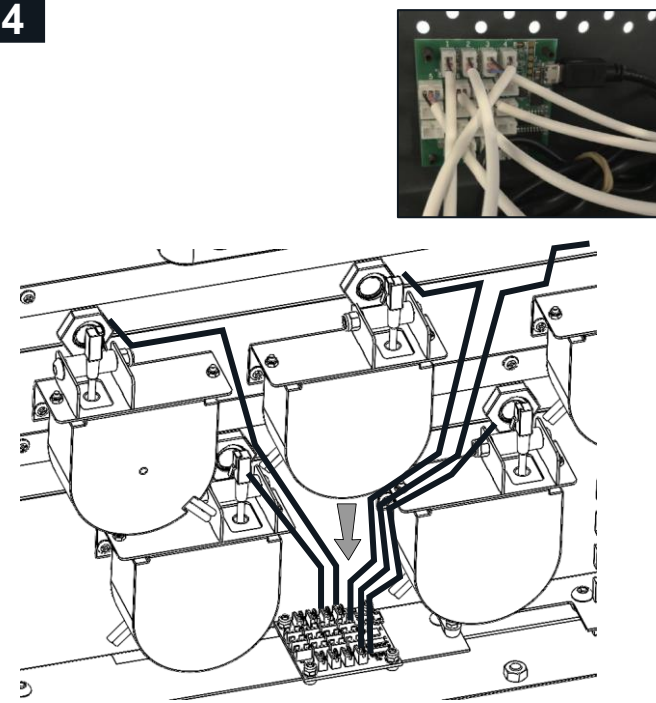





25

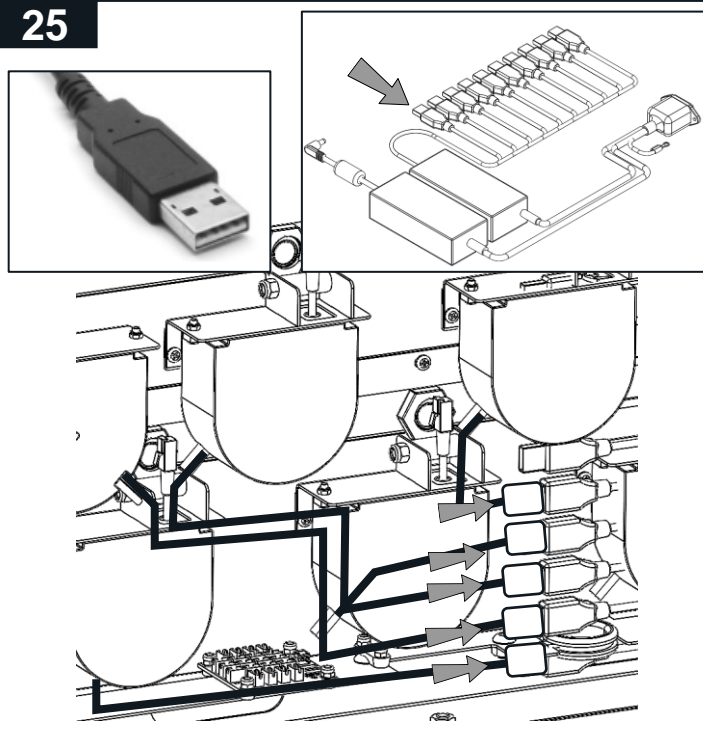


26

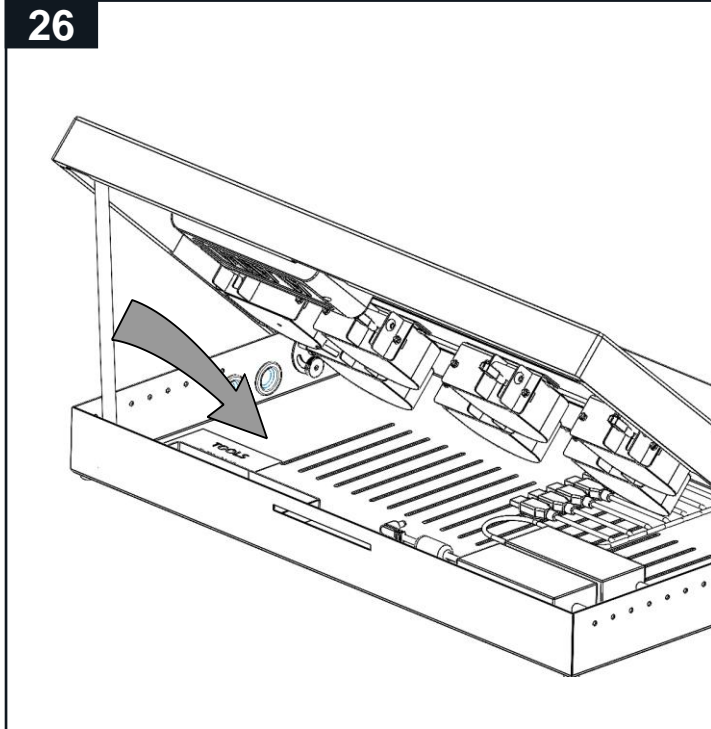


27

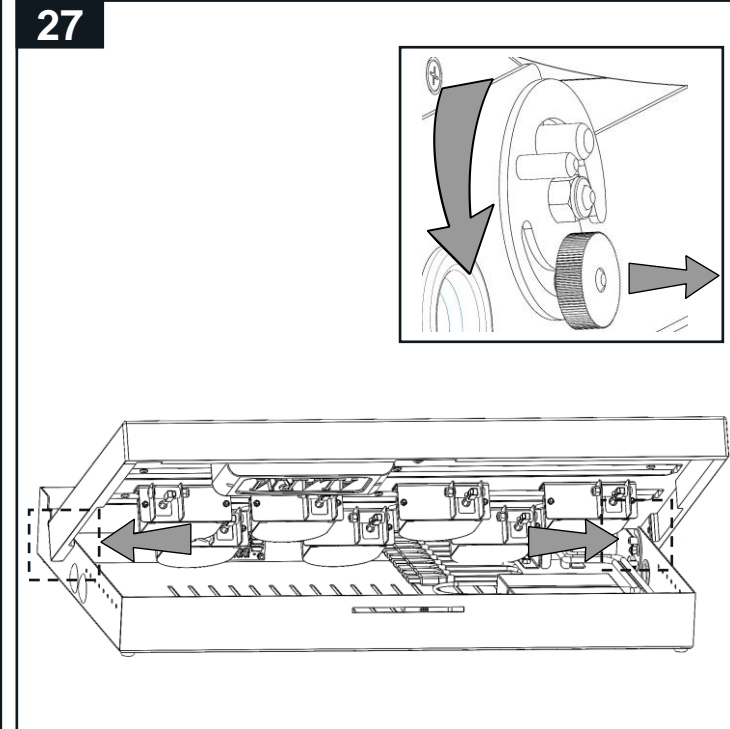


28

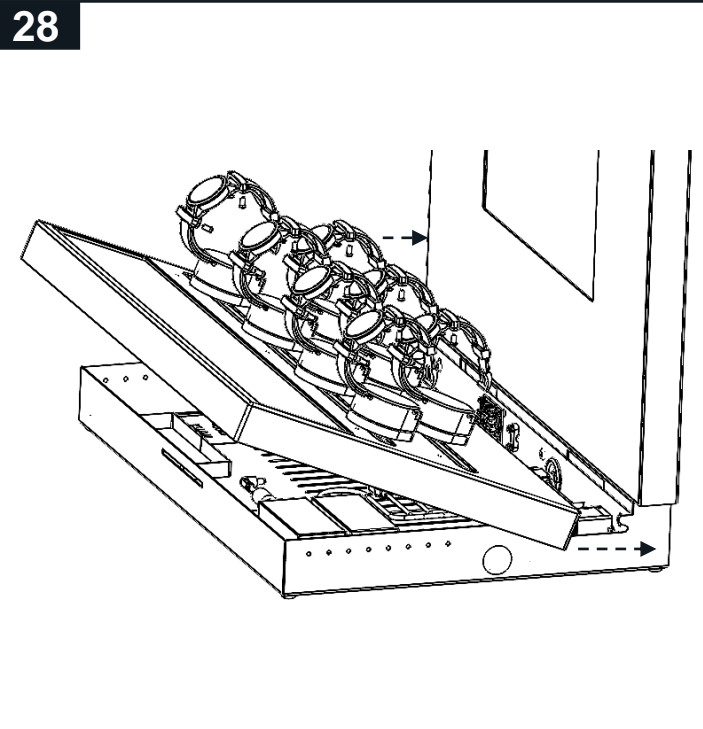



29

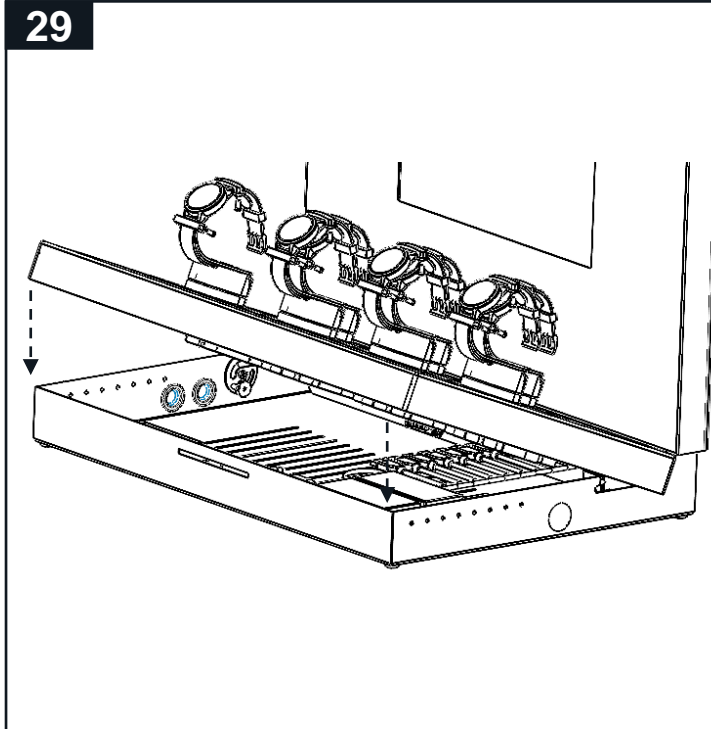

30

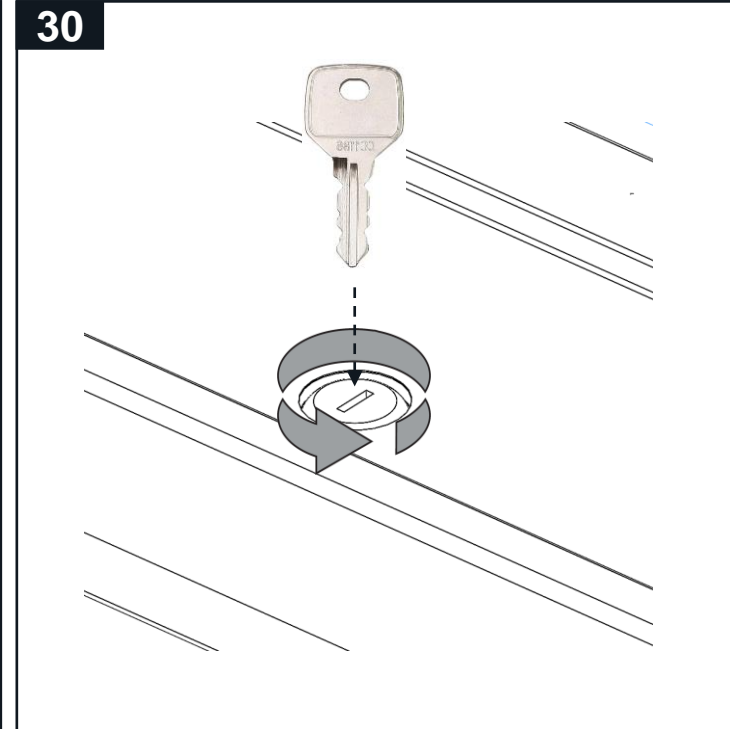


31

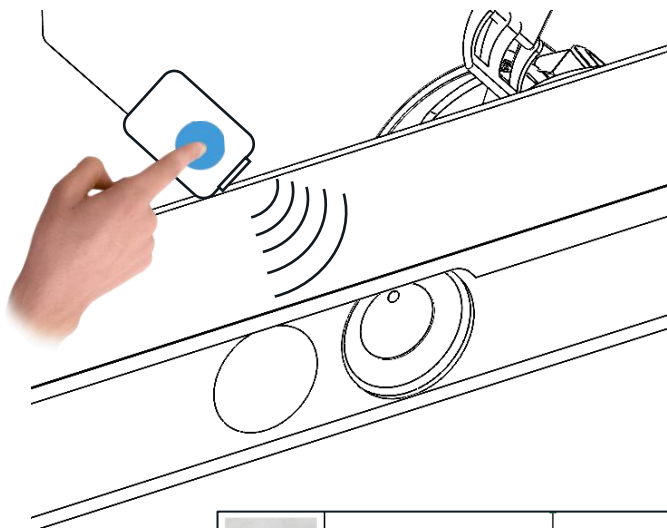


Remote Control (to work with  
Access Control Remote Module)

AS33X



32

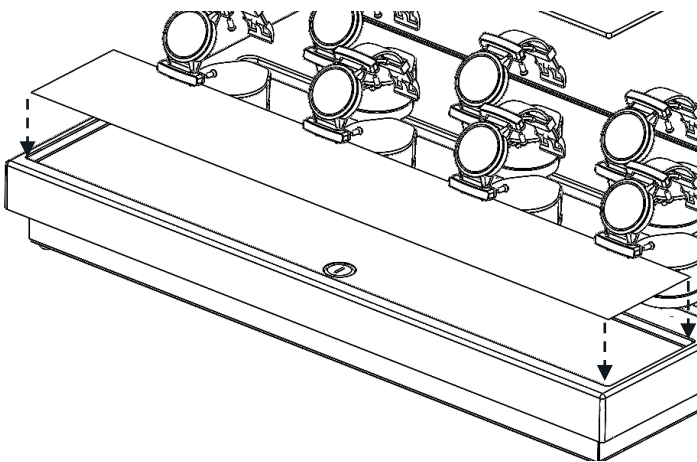

33

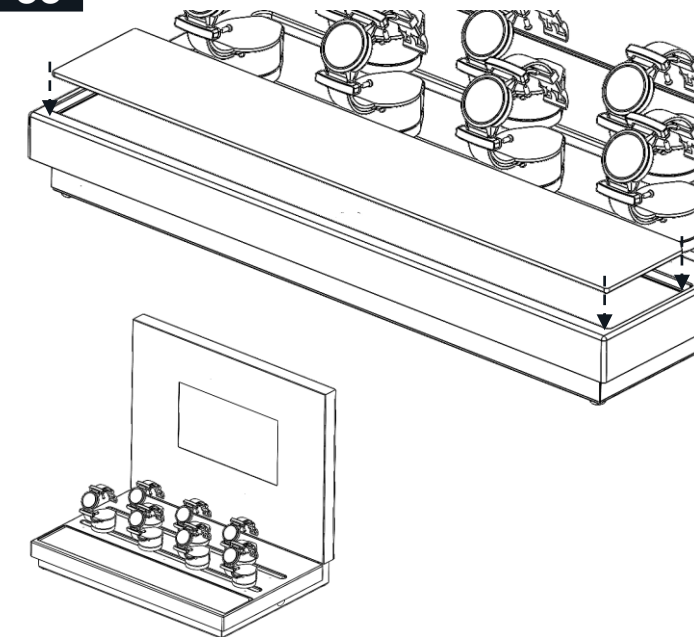


31

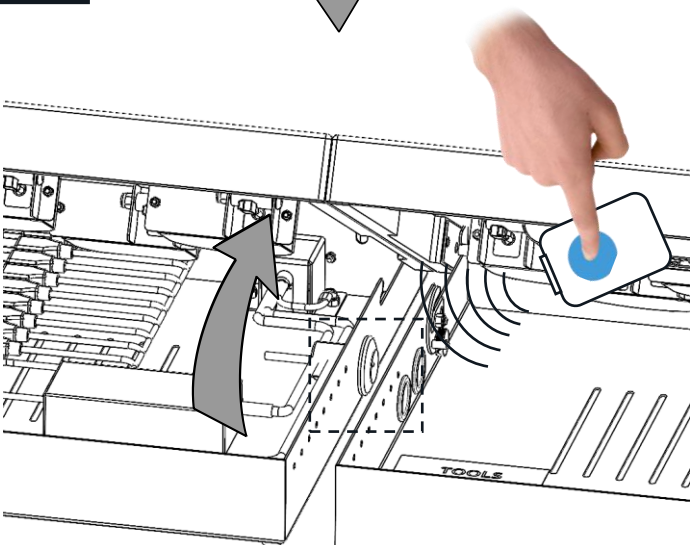

Remote Control (to work with  
Access Control Remote Module)


AS33X

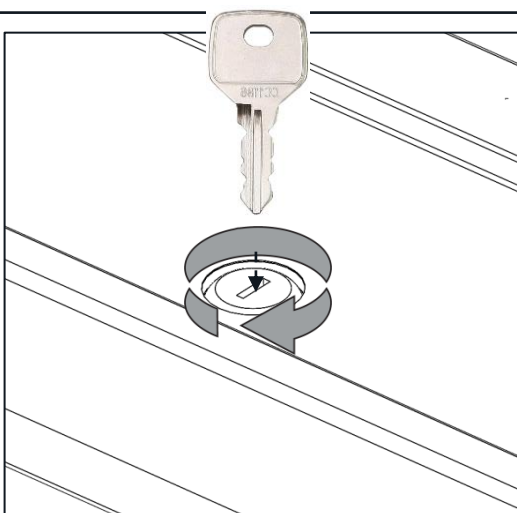


Platinum Security  
Lift and Learn function  
Power for live products with USB-C Charging  
Alarm included  
Positions 1-5





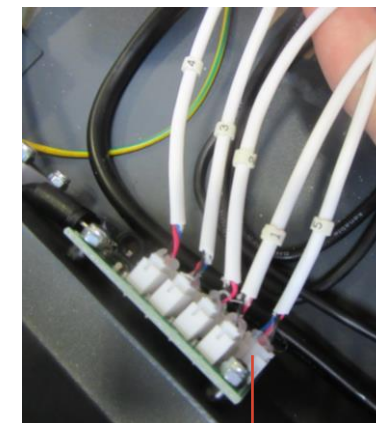

Lift and Learn cables  
for PCB board  
numbered 1-5

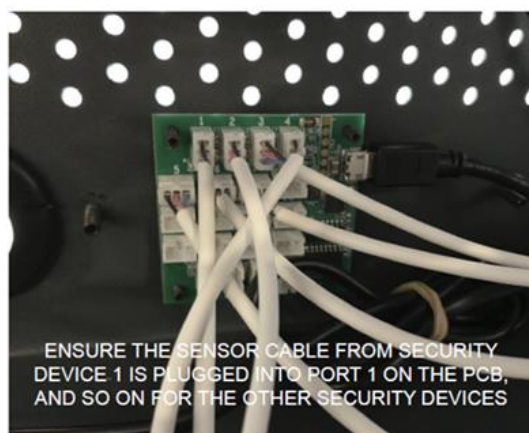

ENSURE THE SENSOR CABLE FROM SECURITY  
DEVICE 1 IS PLUGGED INTO PORT 1 ON THE PCB,  
AND SO ON FOR THE OTHER SECURITY DEVICES



**IMPORTANT:**  
IF YOU NEED TO REMOVE A SENSOR CABLE  
USE A PAIR OF LONG NOSE PLIERS.  
DO NOT PULL ON THE CABLE