


GARMIN

CORPORATE DISPLAY

P12674 | 19/11/2024

CTU + SCREEN HEADER
+ BRONZE POSTS

TOOLS REQUIRED – SUPPLIED




4MM ALLEN KEY

Parts


(A) X1

600MM

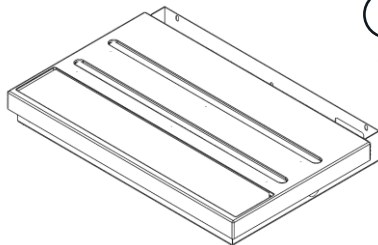


(B) X1

600MM



(D) X7



**BRONZE
SECURITY
POSTS
(PRE-FITTED)**




(C) X1

(E) X5


M6X8MM
SCREW



1

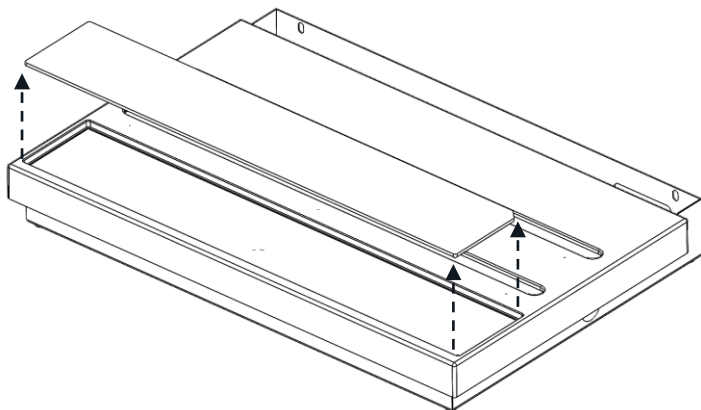


2

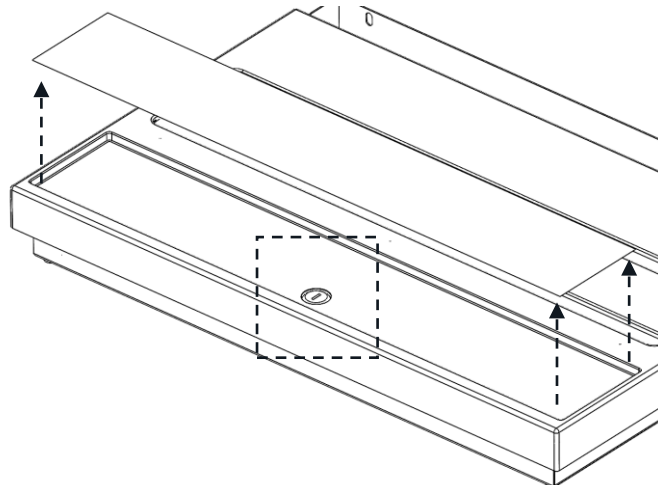


3



4

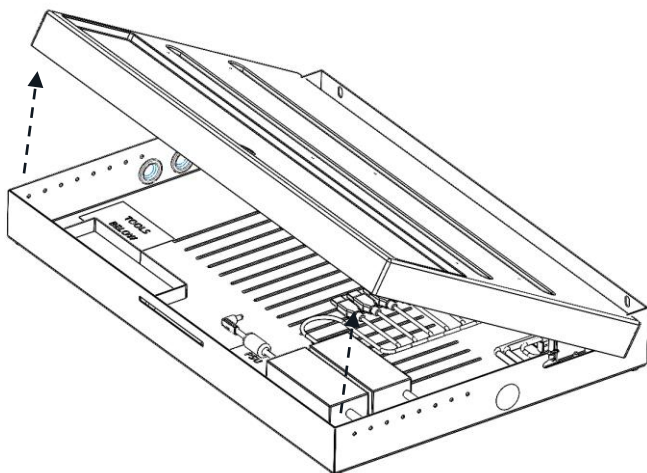


5

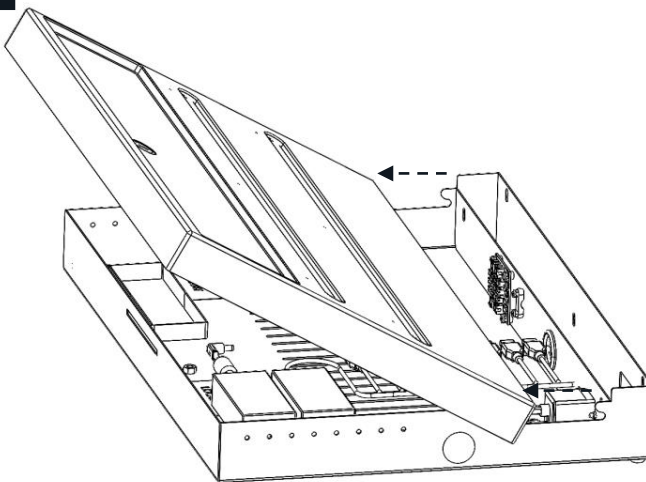


6



**MUST TWIST LOCKING PLATES
TO HOLD TOP SURFACE IN
POSITION
(REPEAT BOTH SIDES)**



2X

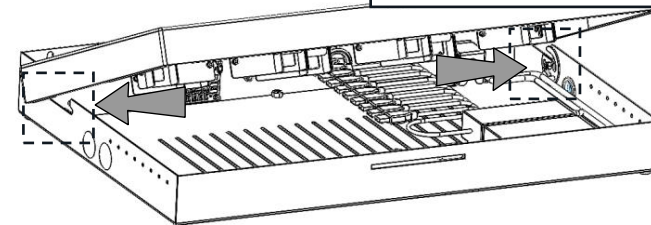


GARMIN®

7




RED SUPPORT ARM MUST BE
SWUNG INTO POSITION TO
SUPPORT TOP PLATE

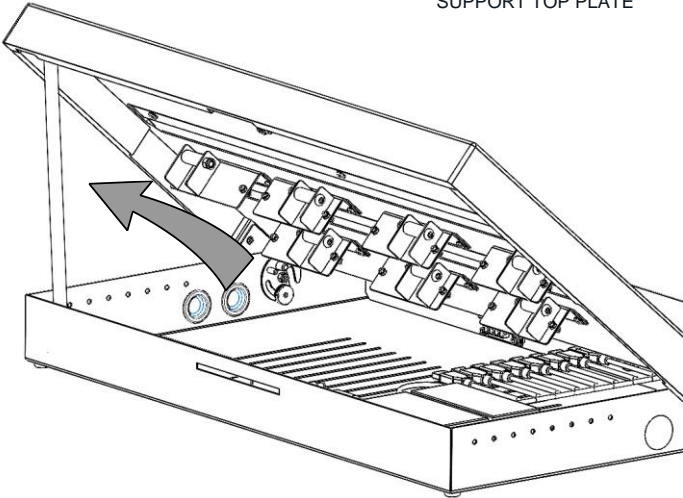


8


IEC PLUG COMING
FROM MAIN POWER
LOOM ON CTU SECTION

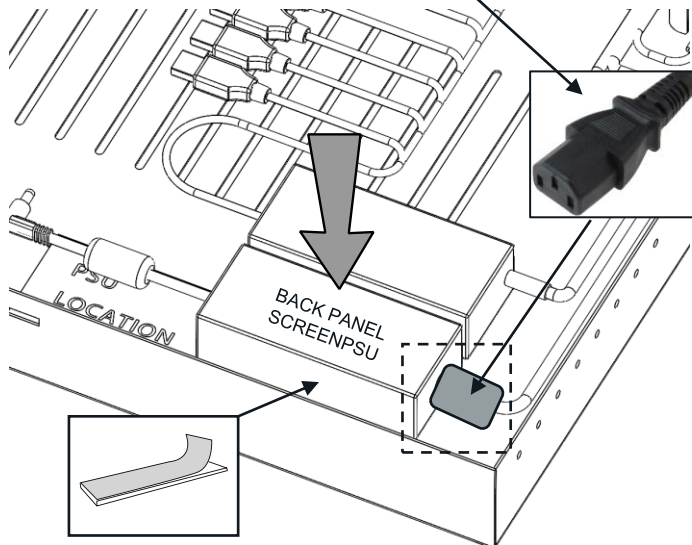


9

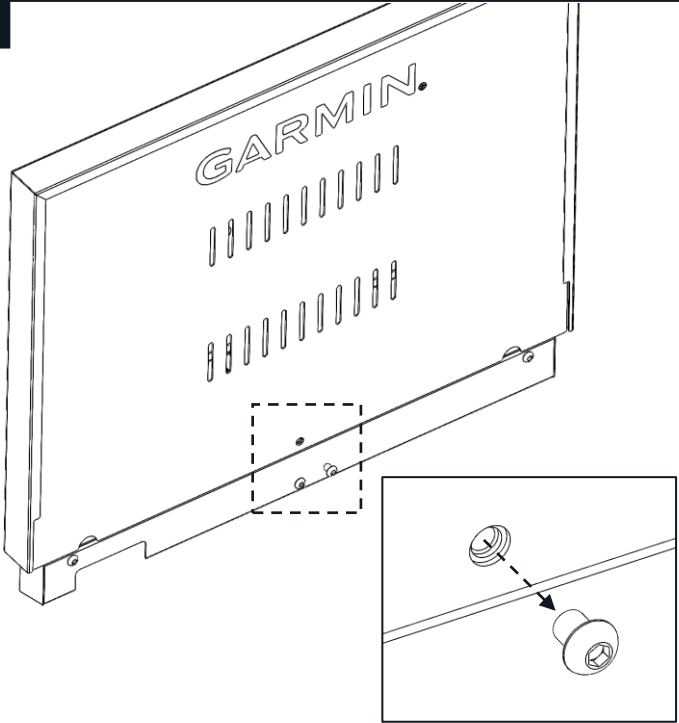


10

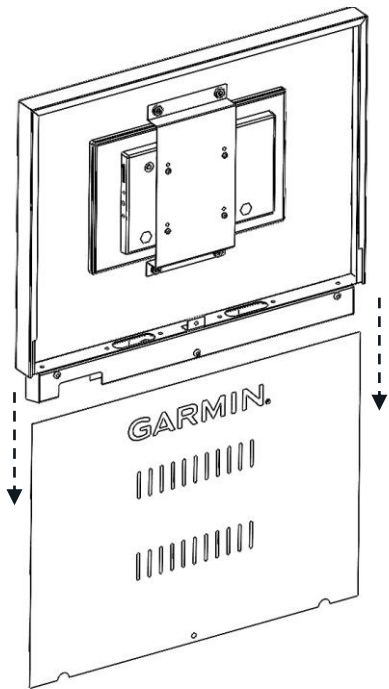


11

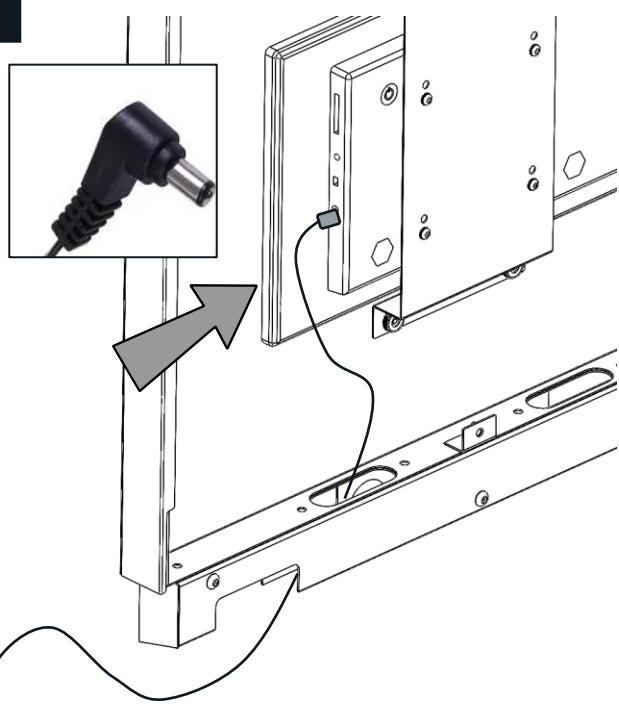


12

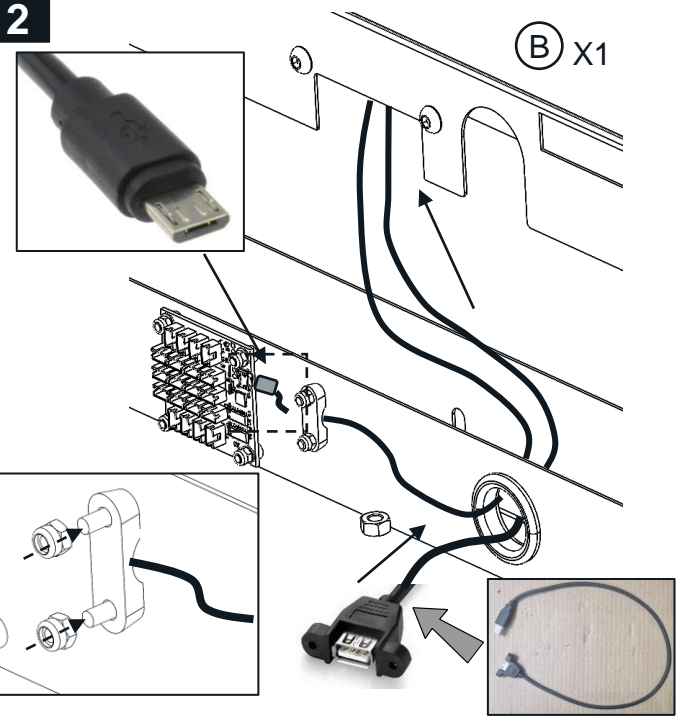


13

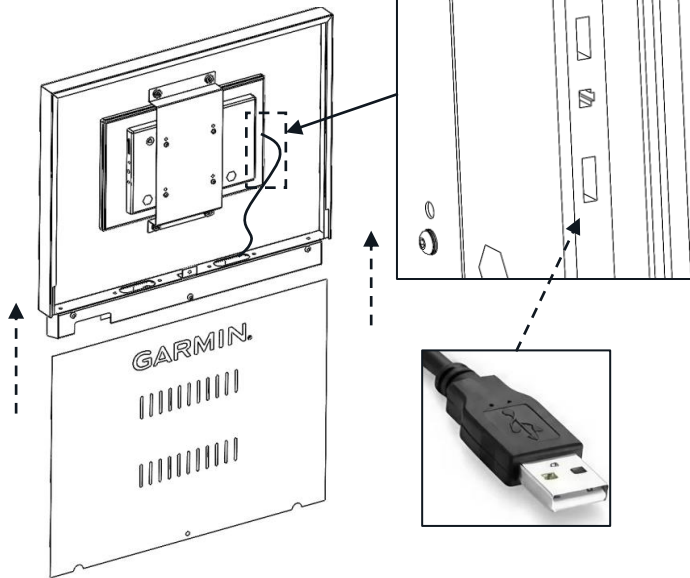


14

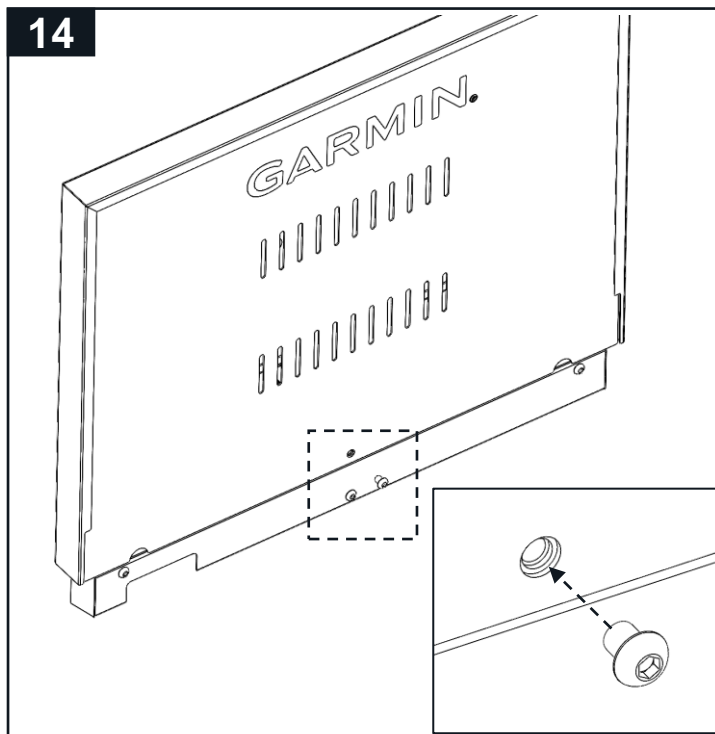


15

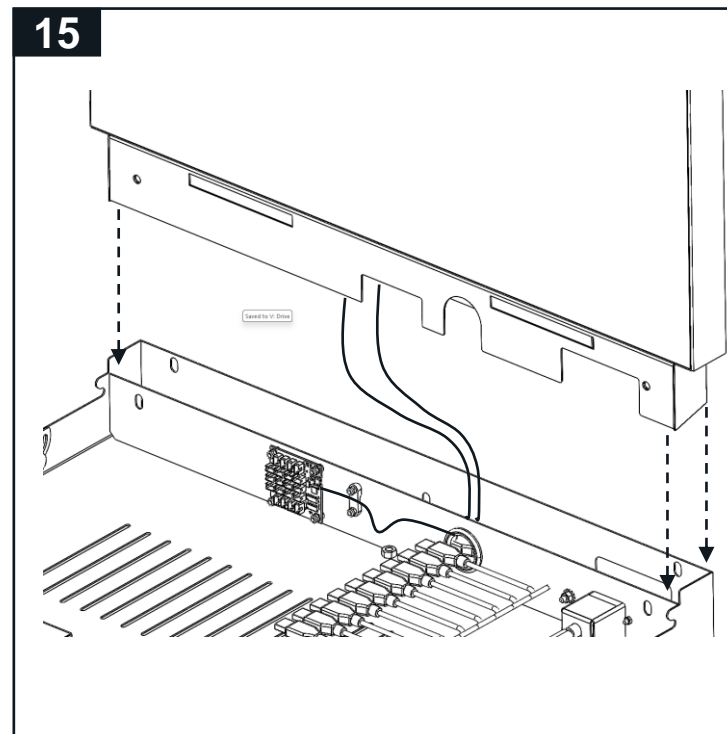


16

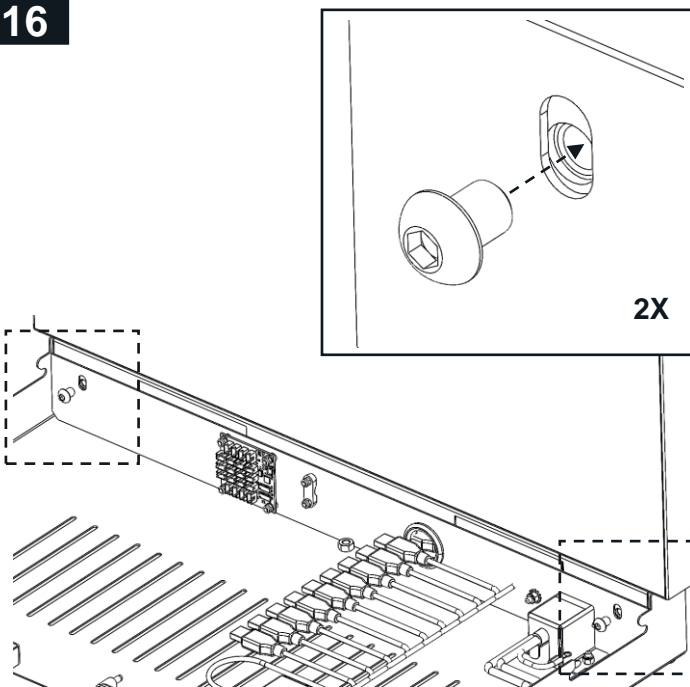



17

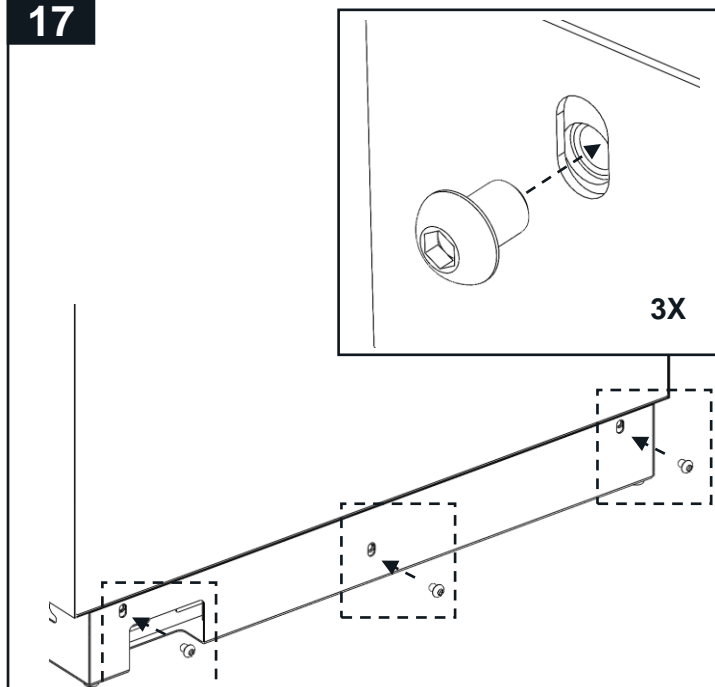


18

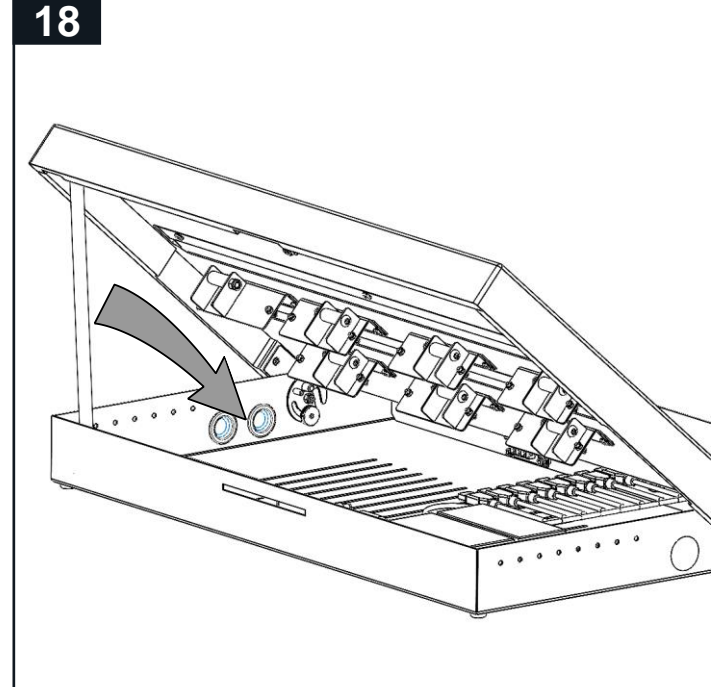


19

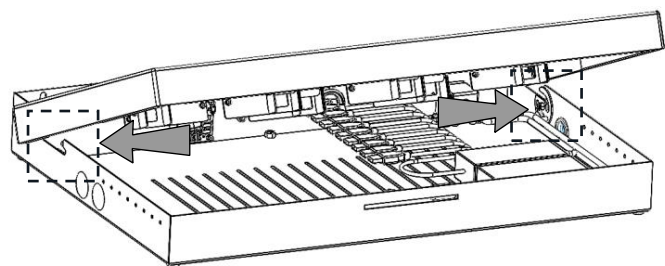


20

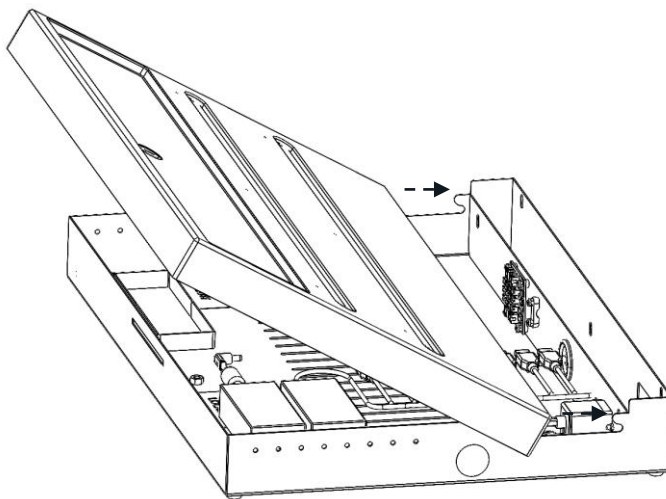


21

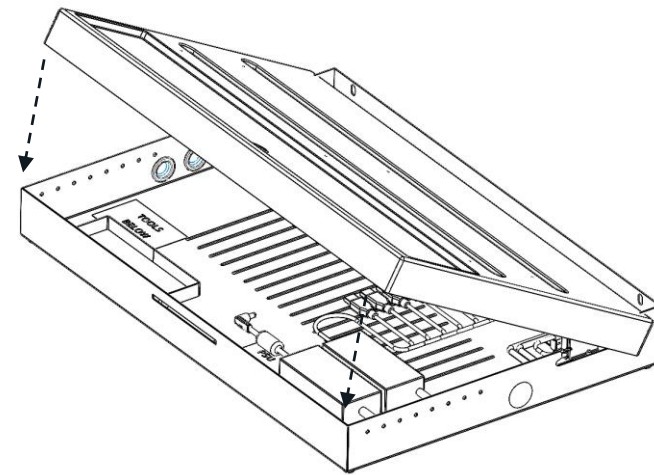


22

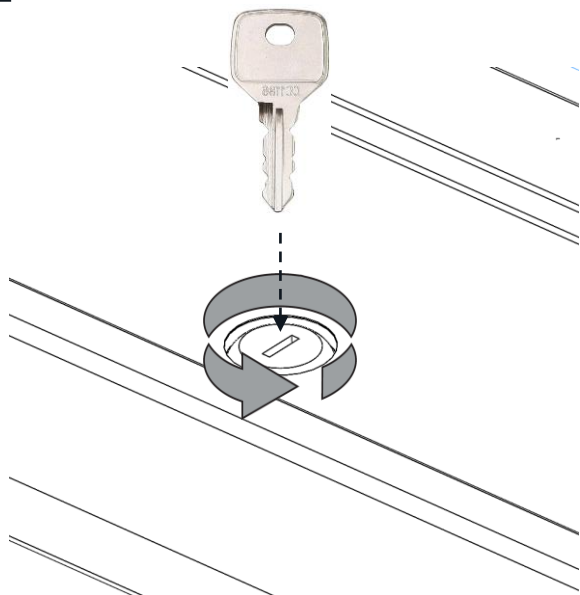







23

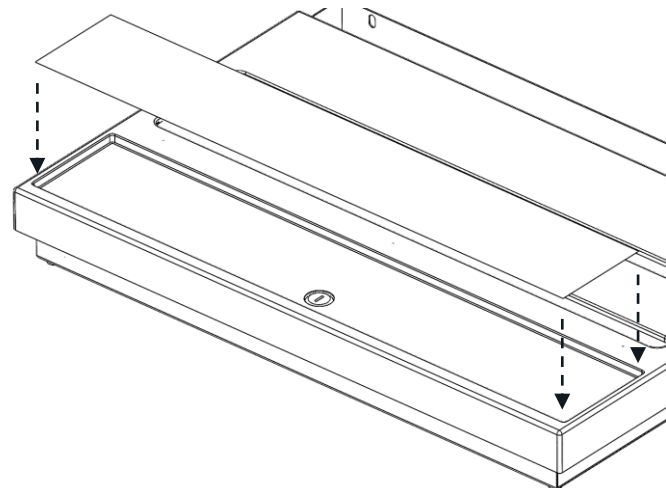

24

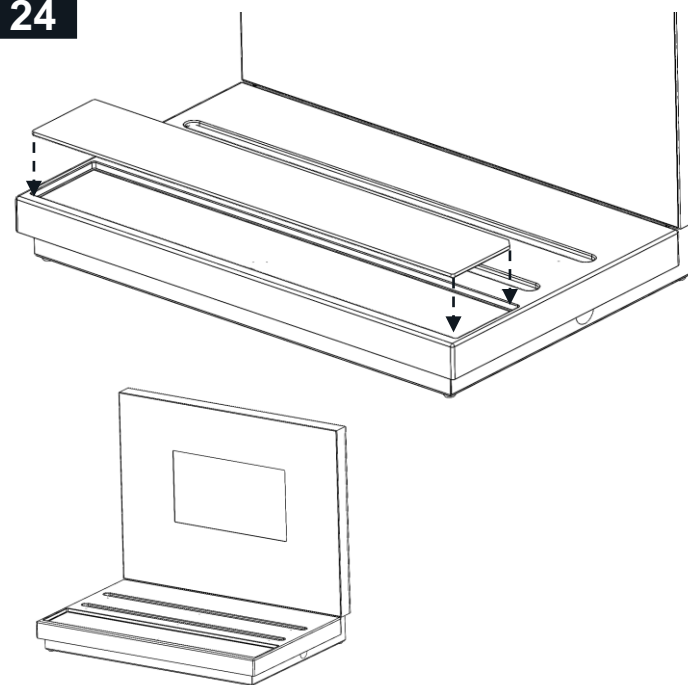


Fitting security to your CTU

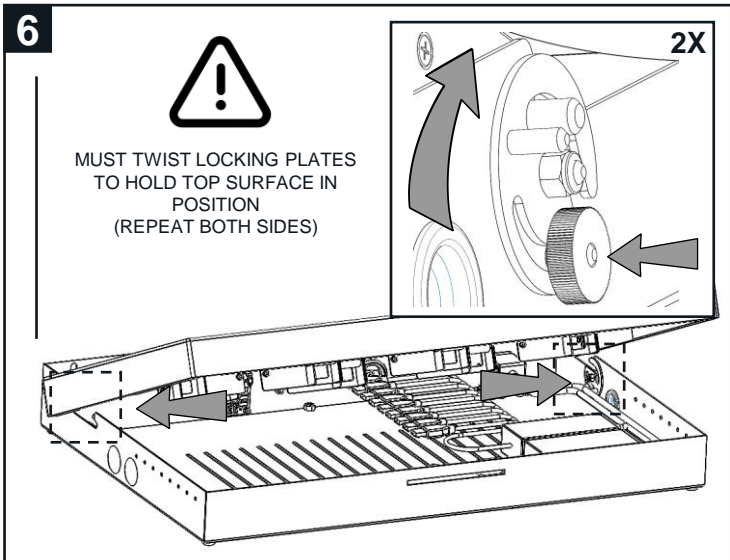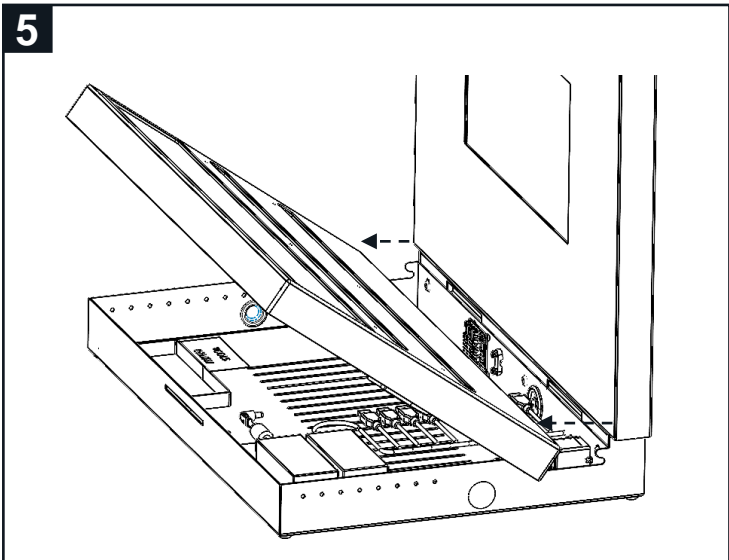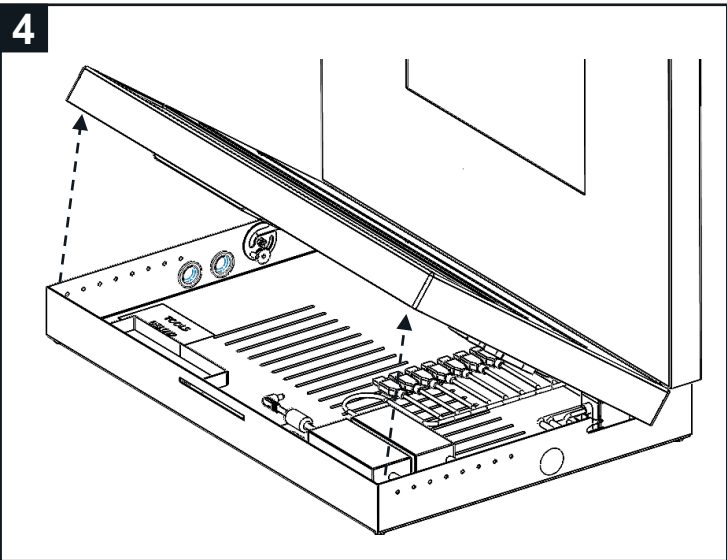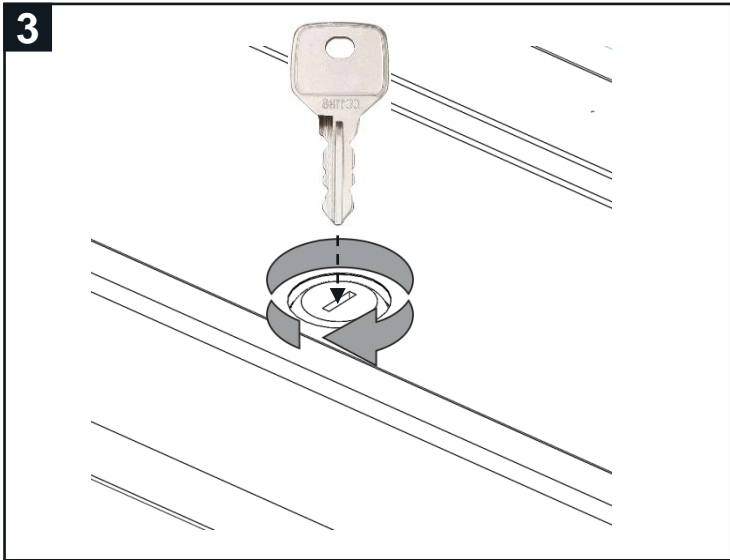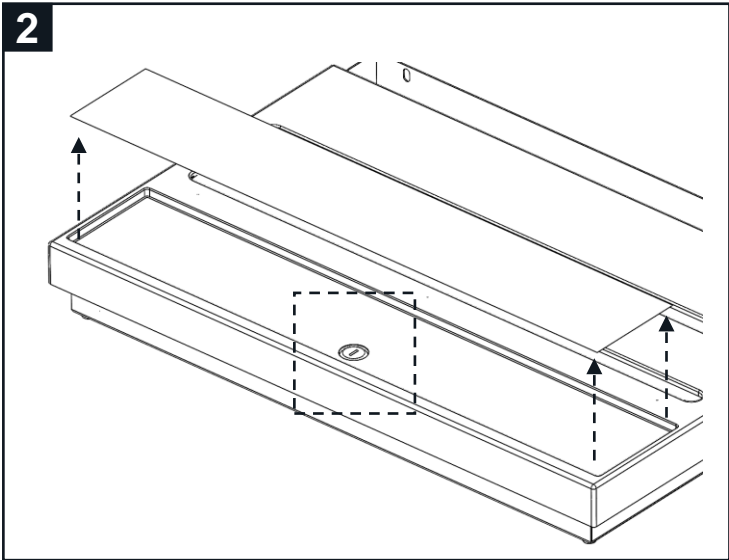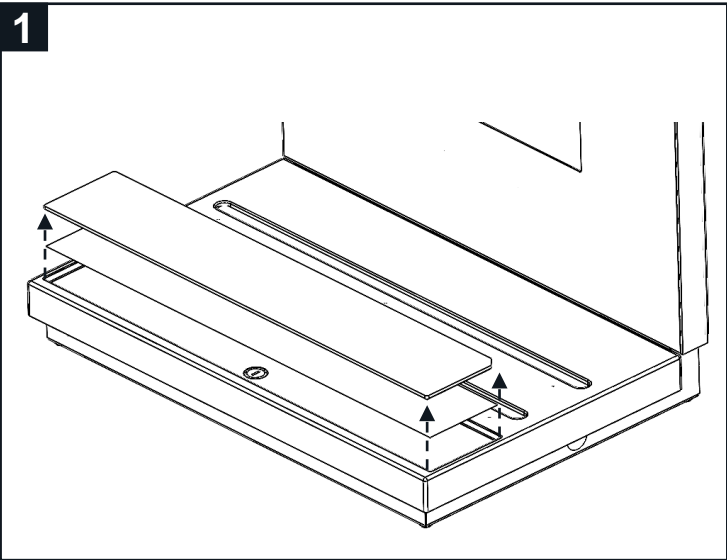


7




RED SUPPORT ARM MUST BE
SWUNG INTO POSITION TO
SUPPORT TOP PLATE

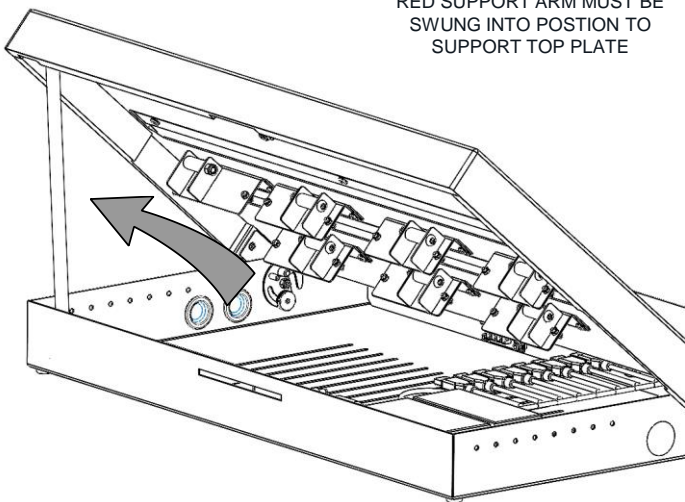


8

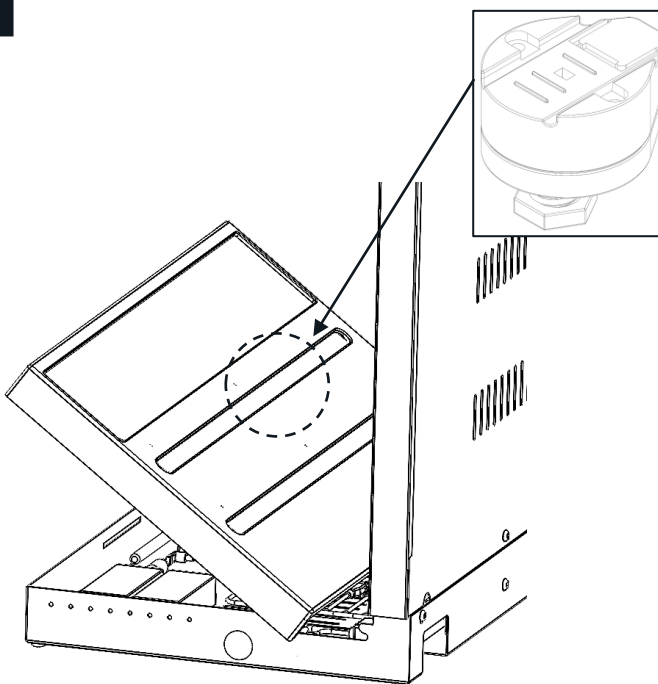

9

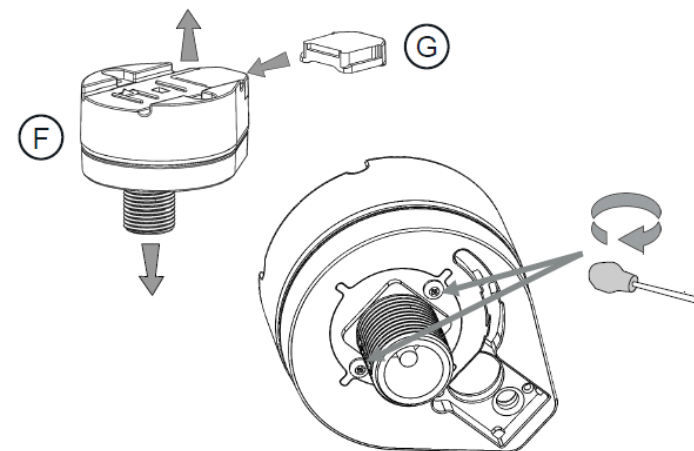


10

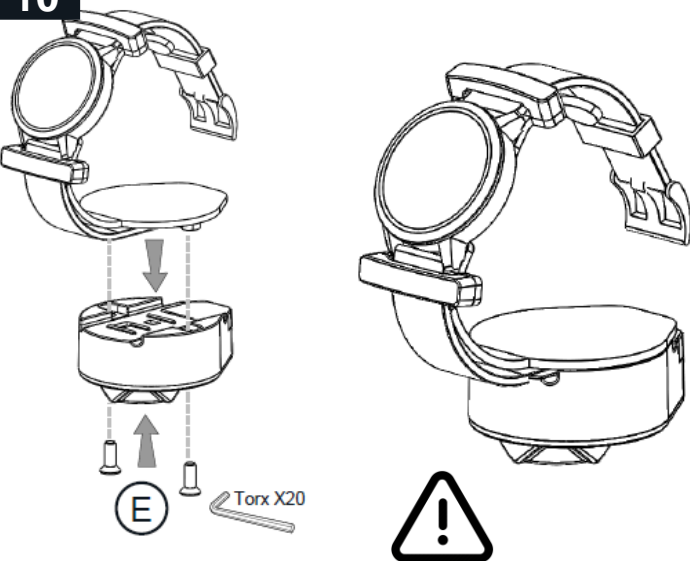

ON BRONZE FIXED CRADLES IT IS
IMPORTANT THAT THE METAL CRADLE IS
FITTED TO THE TOP SECTION OF THE
PLASTIC POST FIRST, BEFORE MOUNTING
ONTO UNIT




11

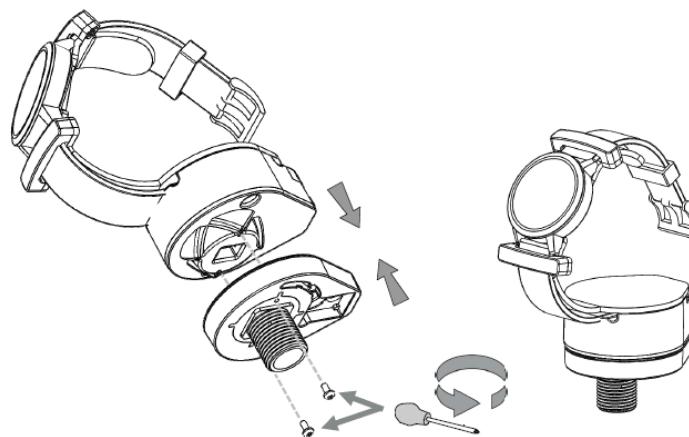

12


REPEAT THE FOLLOW PROCESS
FOR ALL POSTS (NO. DEPENDING
ON 400 OR 600 CTU)

7 OFF FOR 600MM
5 OFF FOR 400MM

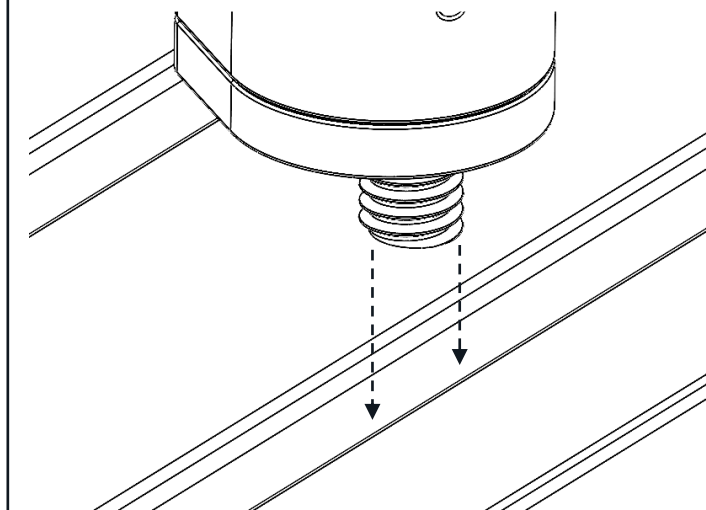


GARMIN®


13

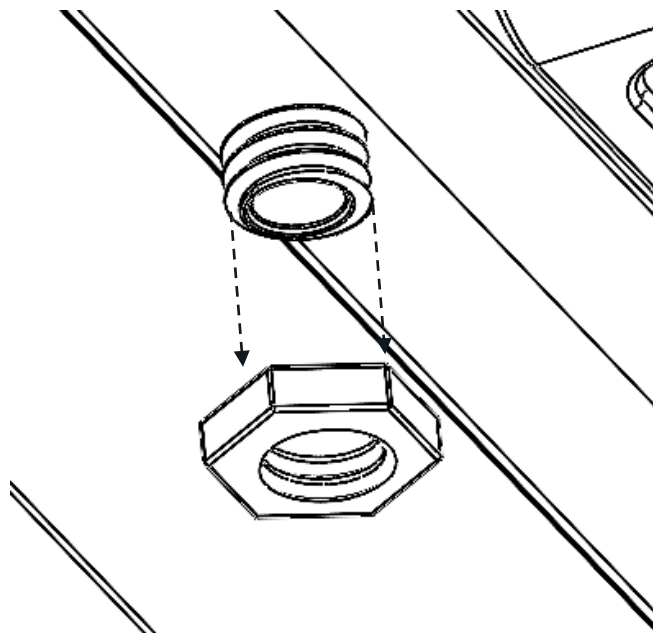


14

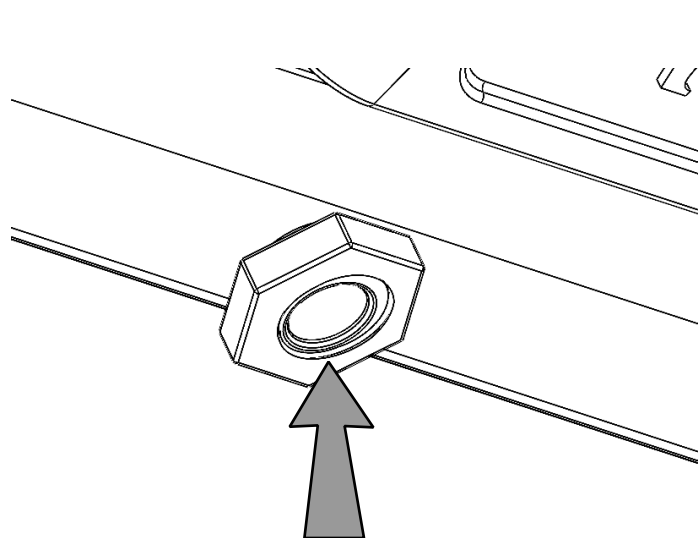


15

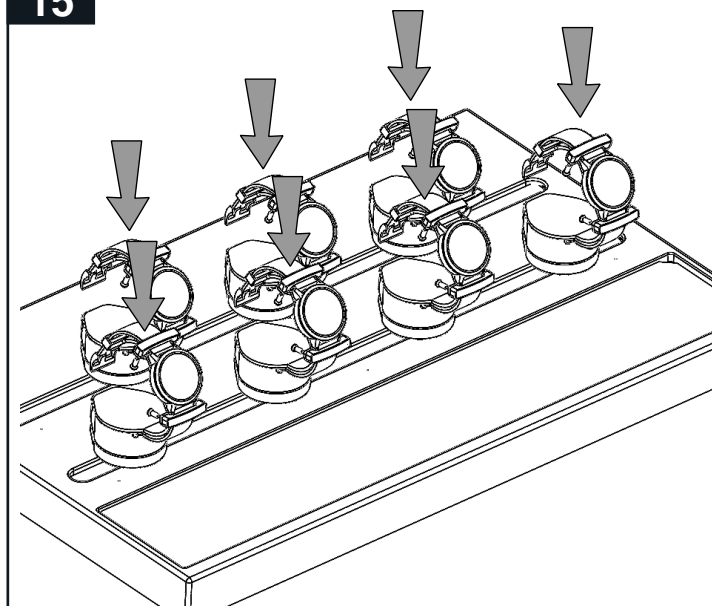


16

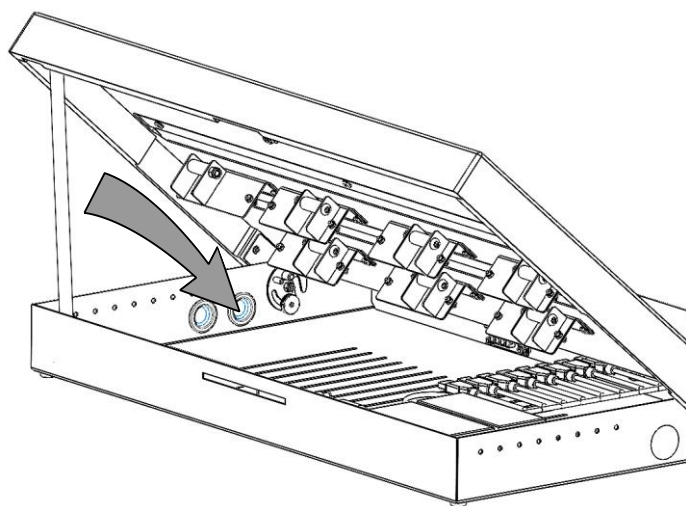


17

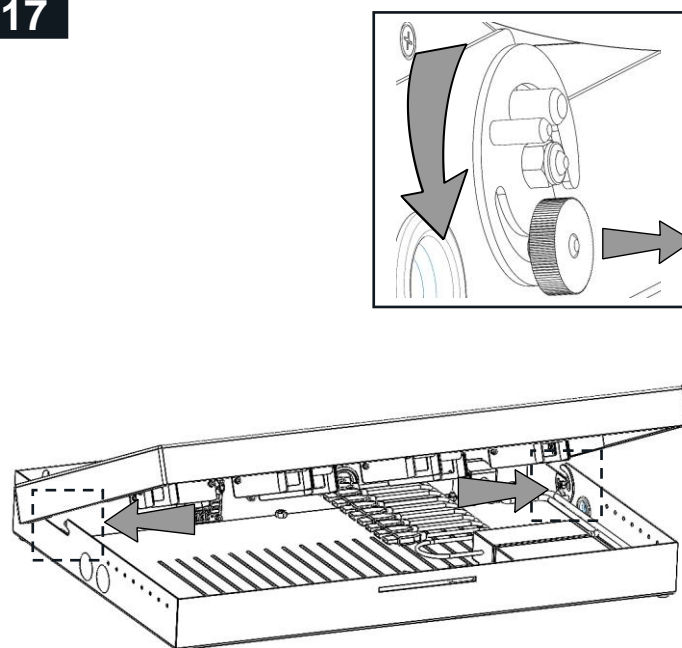


18

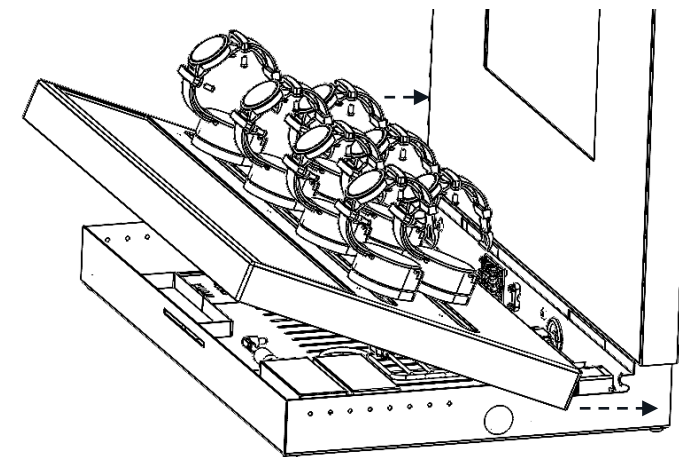


19

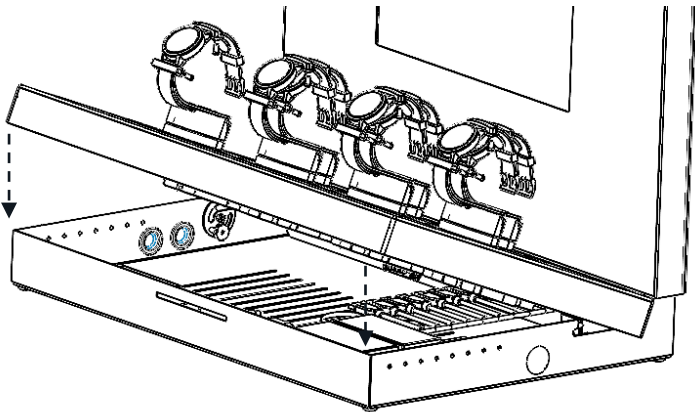



20

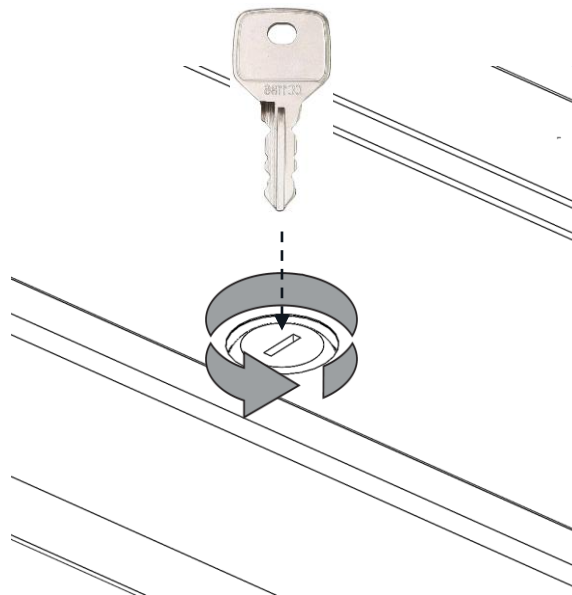

21

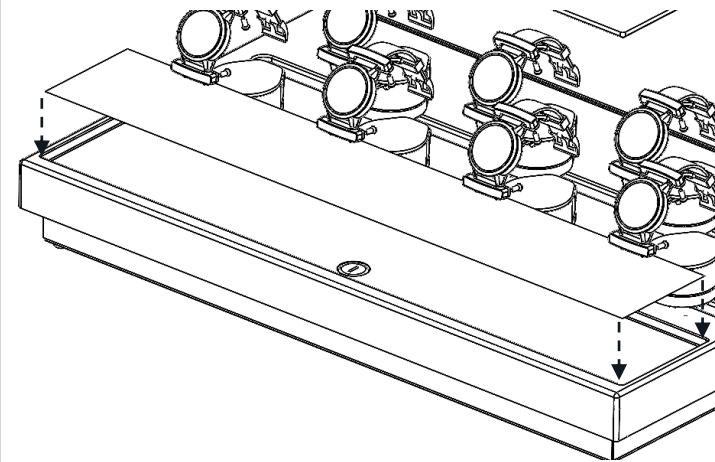

22

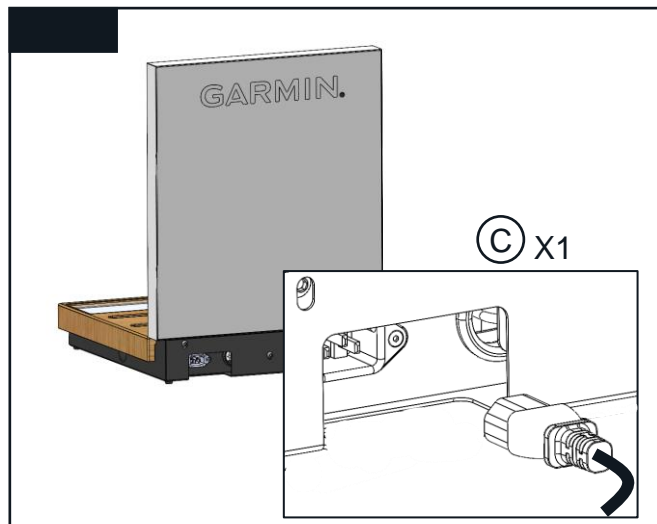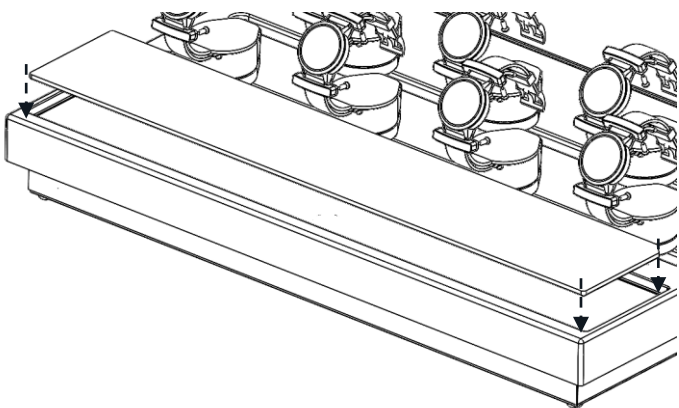

Bronze Security
Fixed posts only
Positions 1-7





8way PSU power loom

Screen PSU

****IMPORTANT****

**Your displays come loaded with default video content, this is not lift and learn.
Lift and learn content must be loaded locally to match your store planogram.**

**This guide is for loading content when the screens are not connected to the internet
or our Connie content management platform**

Content Loading


1. Open the base of your unit & locate the content USB port.
2. Ensure display is turned on and the screen is working.
3. Insert USB stick into USB port
4. Follow these instructions:




Insert USB into port inside base of unit or side of screen




Tap 5 times top right of screen

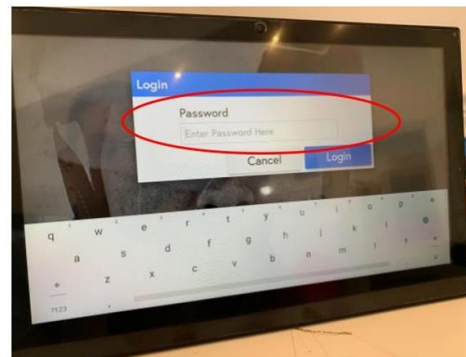


Enter password - display

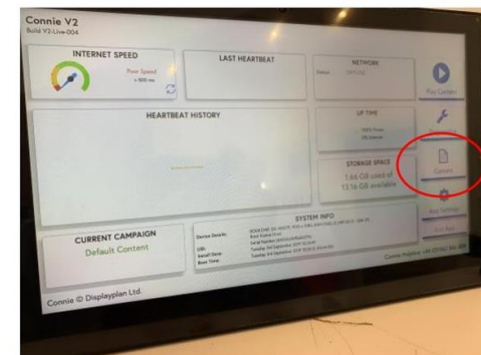


Click content

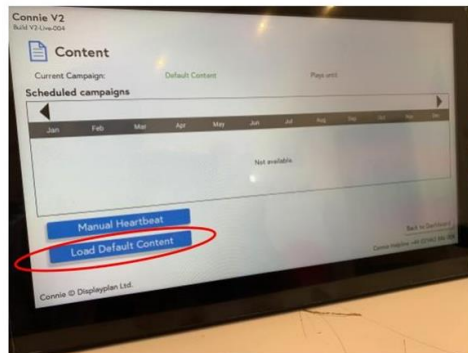

Click load default content

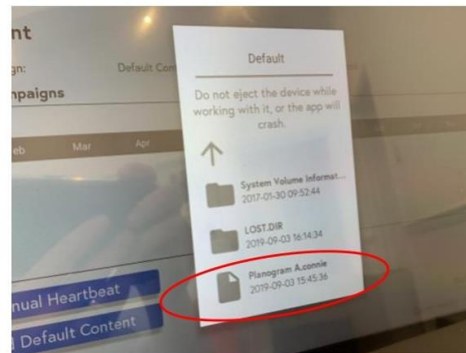

Find the .connie file you have loaded to the USB stick

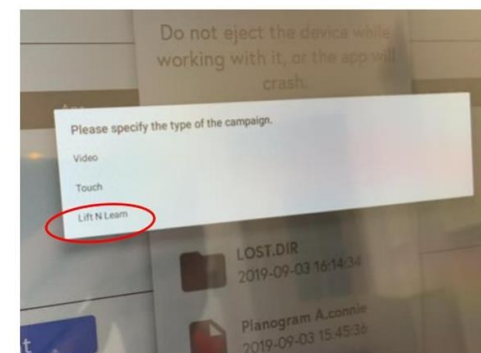

Click lift n learn

Content Test

Check everything has been loaded correctly

1. Reboot the screen by un-plugging at the mains , check the app loads and idle video plays
2. Lift one product, check the content changes to correctly match the product lifted
3. Repeat with all products
4. Lift two products check the correct compare images display
5. Repeat with all products
6. Reboot display again by un-plugging at the mains, allow to re-boot and then process is complete

