


GARMIN

CORPORATE DISPLAY

P12674 | 19/11/2024

CTU + GRAPHIC HEADER +
GOLD POSTS


TOOLS REQUIRED – SUPPLIED




4MM ALLEN KEY

Parts


(A) X1
600MM

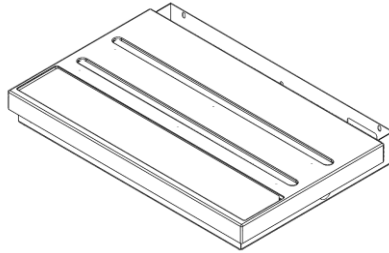


(B) X1
600MM



(B) X7
GOLD
SECURITY
POSTS
(PRE-FITTED)




(C) X5
M6X8MM
SCREW




(C) X1



1

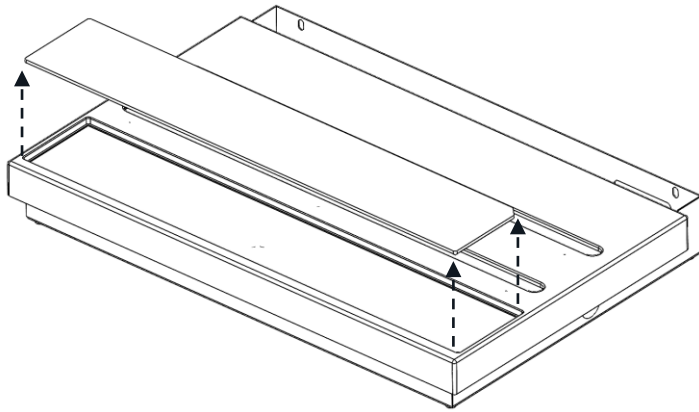


2

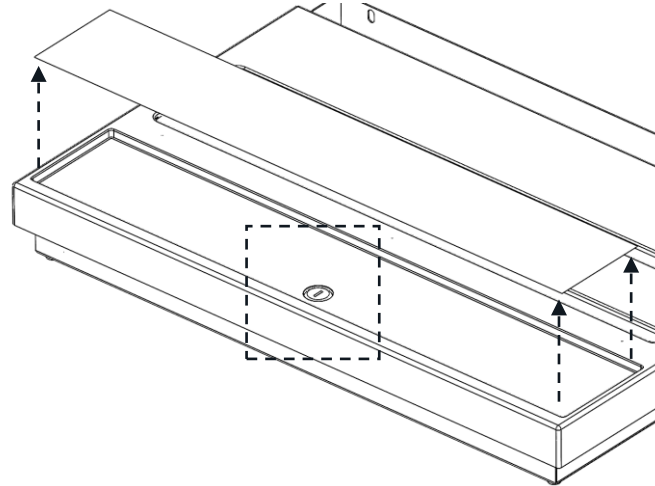


3



4

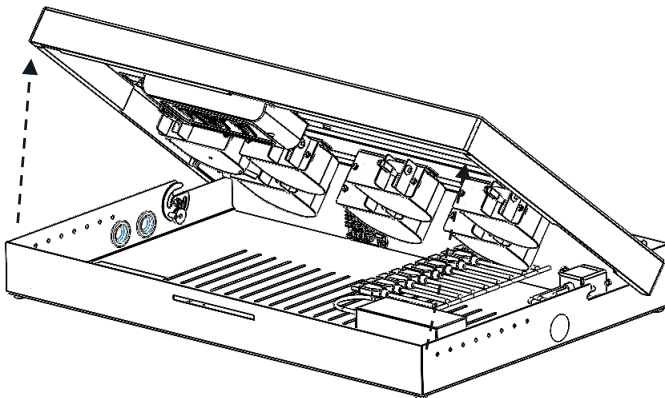


5

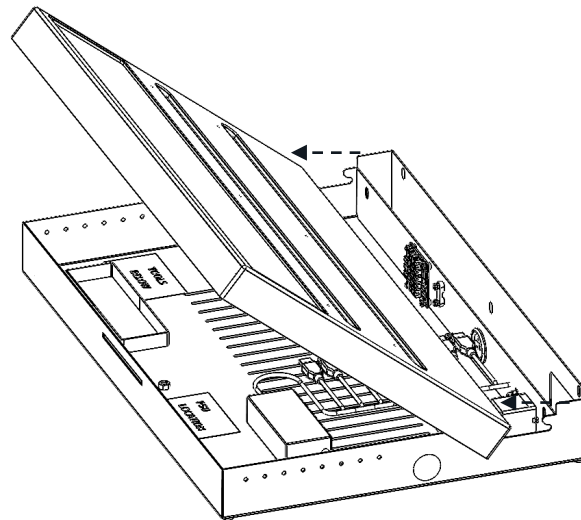


6



MUST TWIST LOCKING PLATES
TO HOLD TOP SURFACE IN
POSITION
(REPEAT BOTH SIDES)



2X

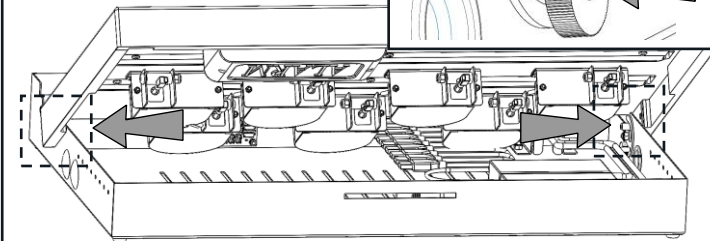


GARMIN®

7




RED SUPPORT ARM MUST BE
SWUNG INTO POSITION TO
SUPPORT TOP PLATE


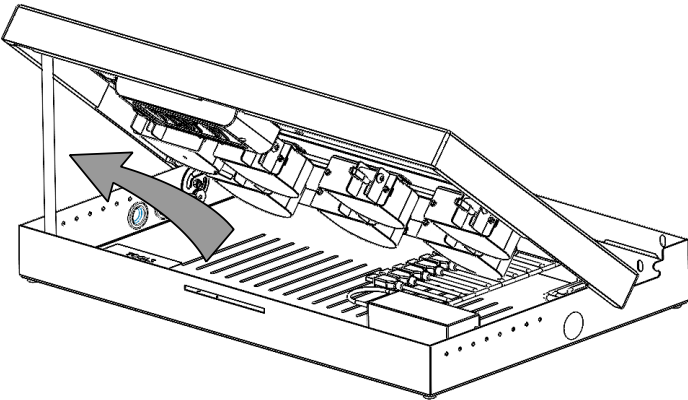


8



(B) X1

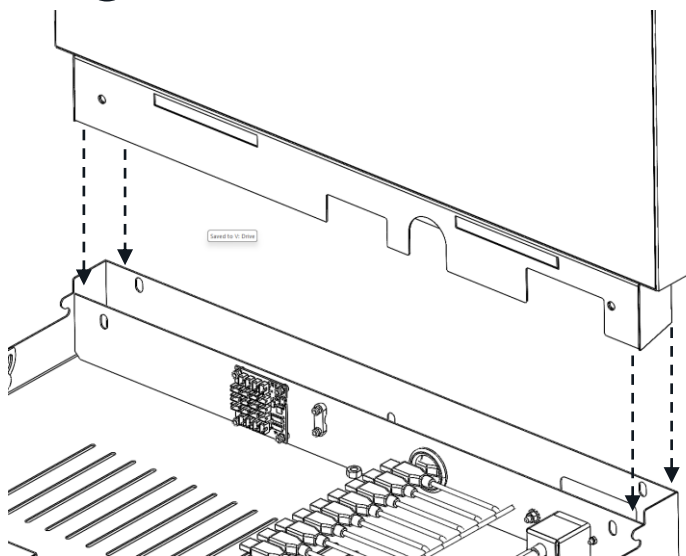


9

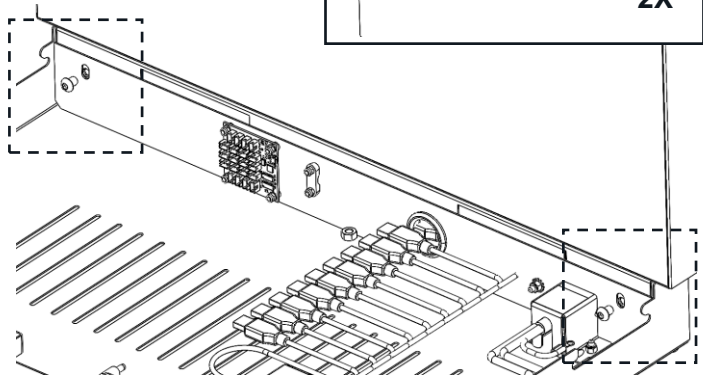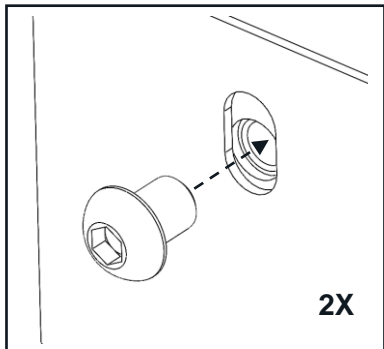



10

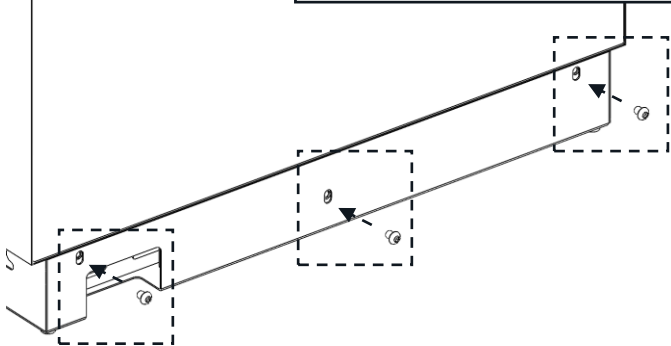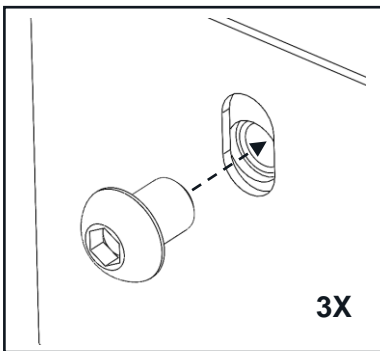


11

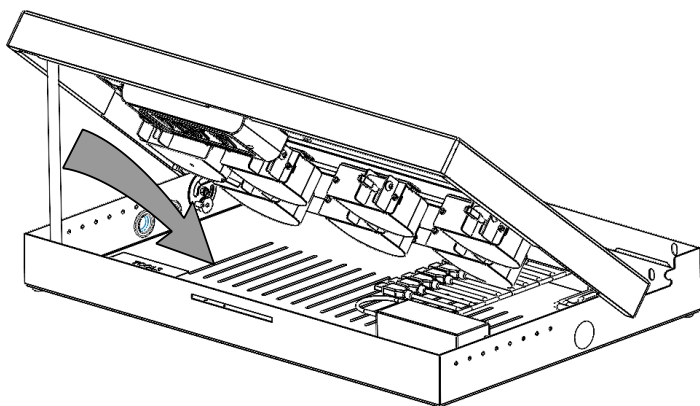


12

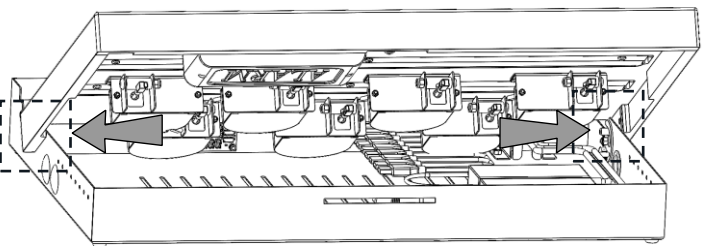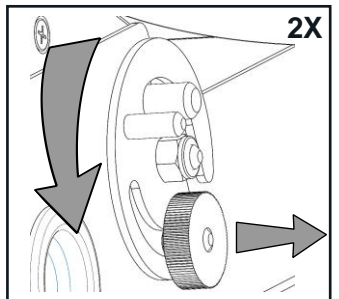


13

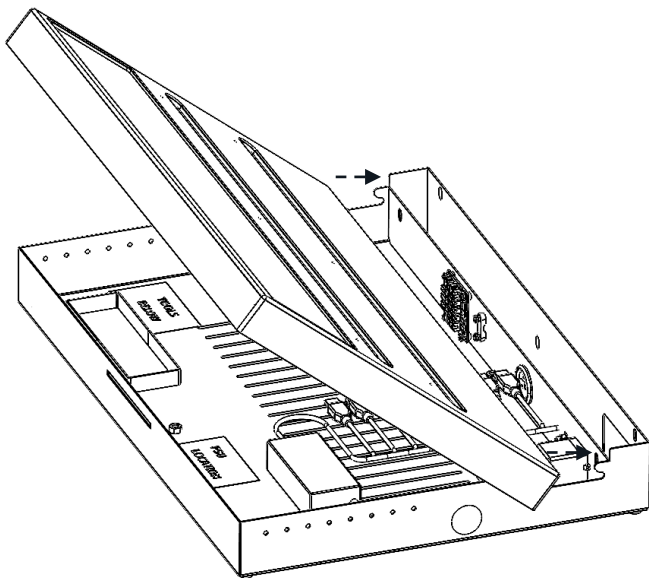


14

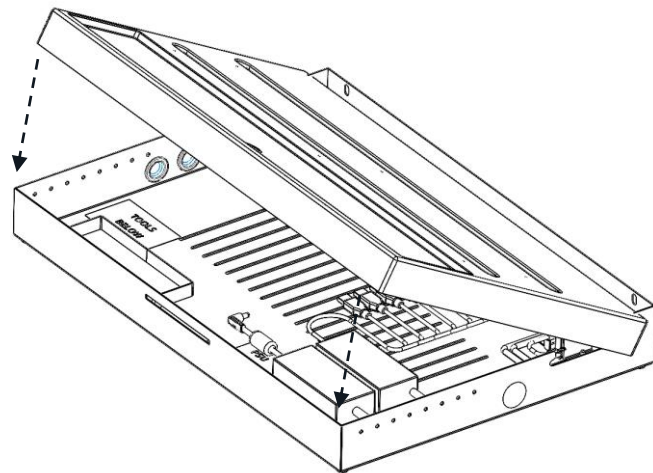


15

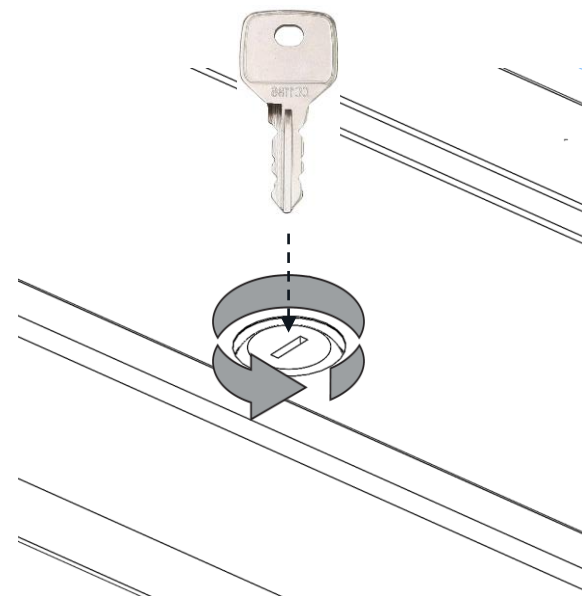


16

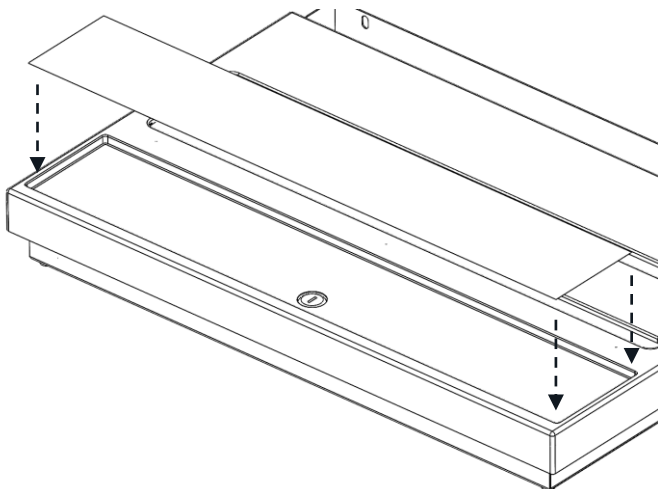







17

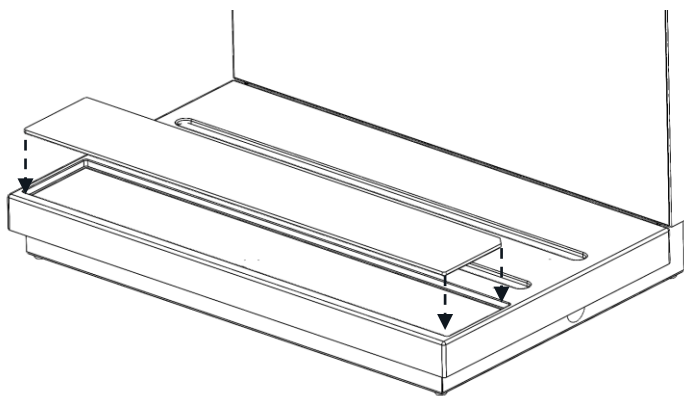

18

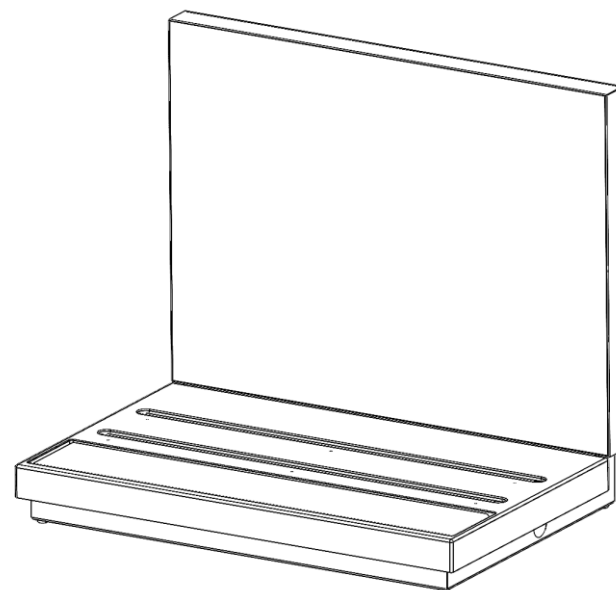


Fitting security to your CTU

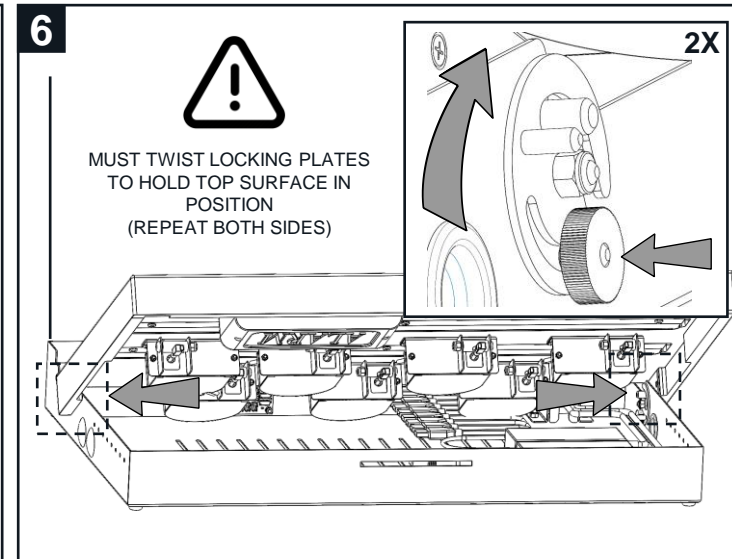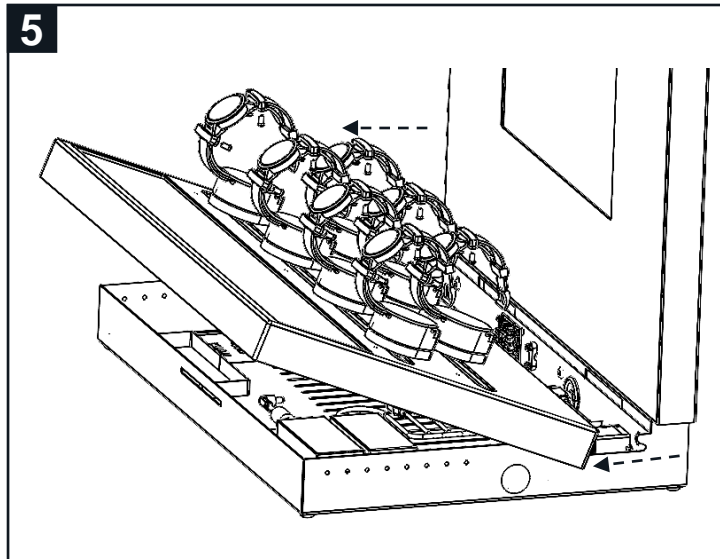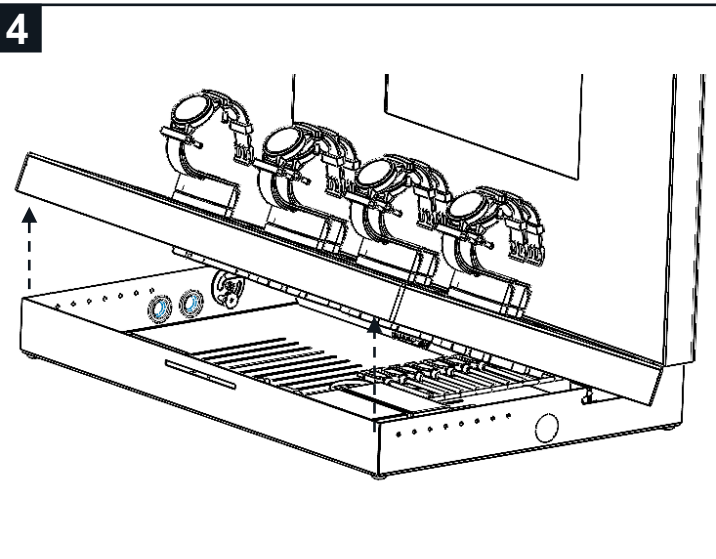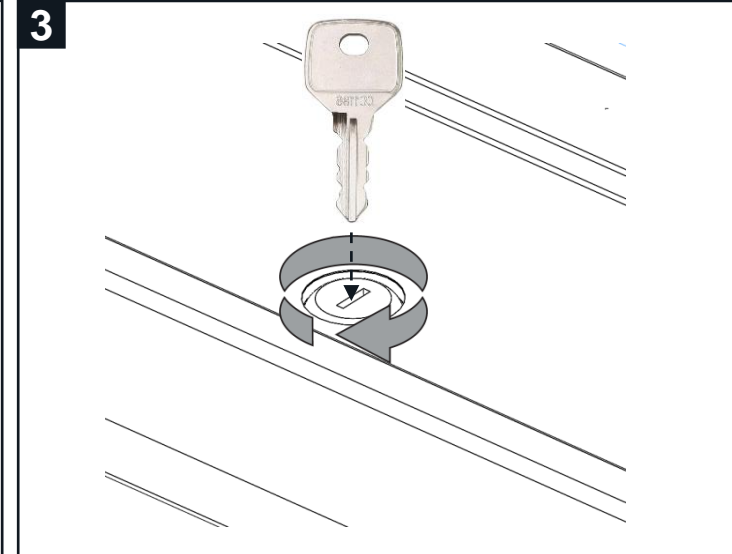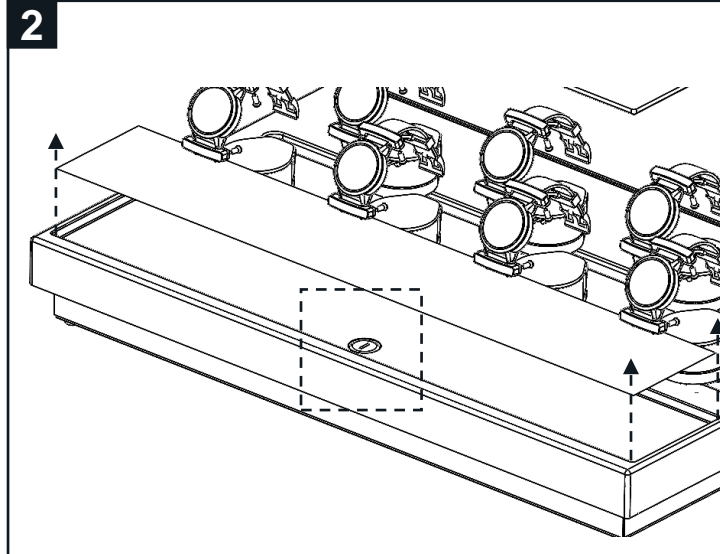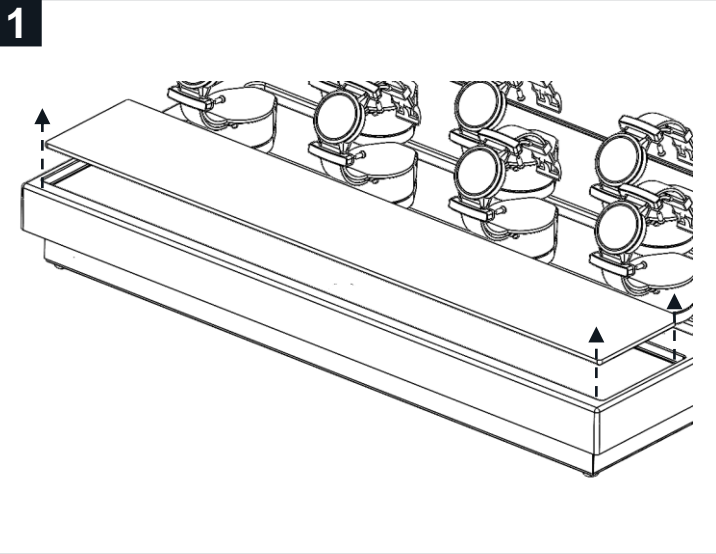


7




RED SUPPORT ARM MUST BE
SWUNG INTO POSITION TO
SUPPORT TOP PLATE

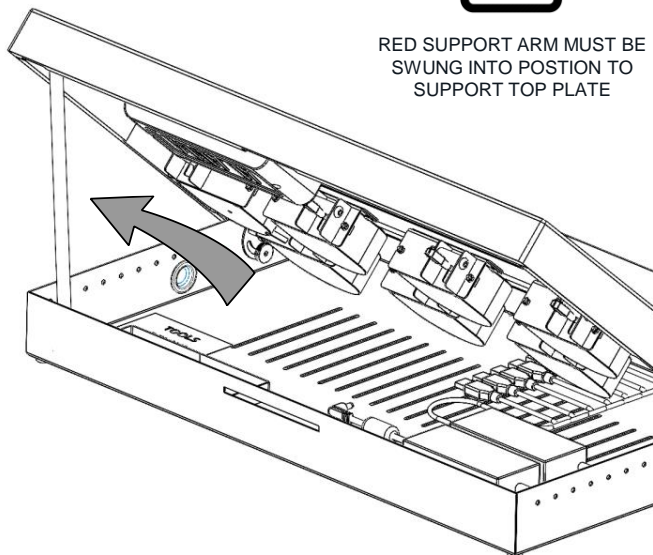


8

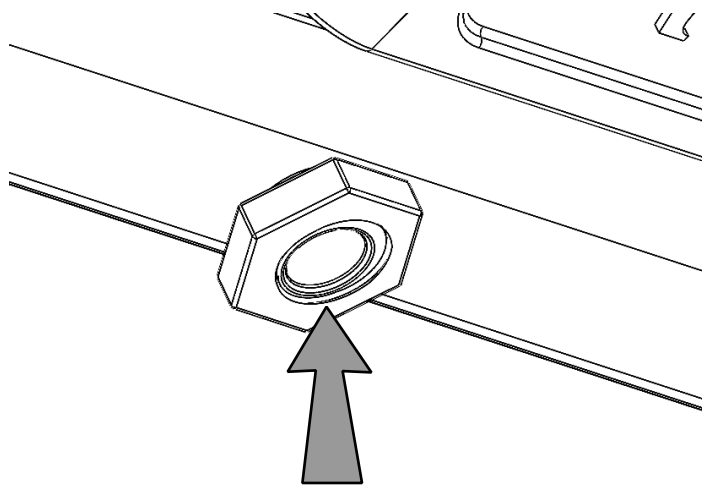


9

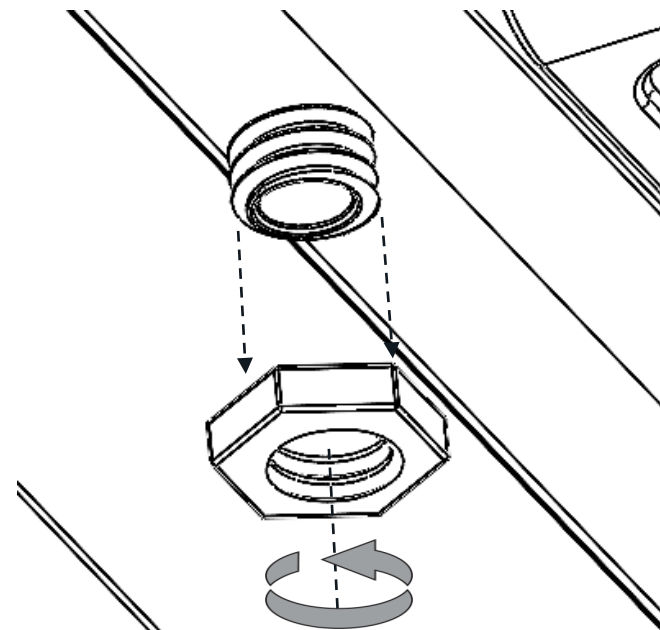


10

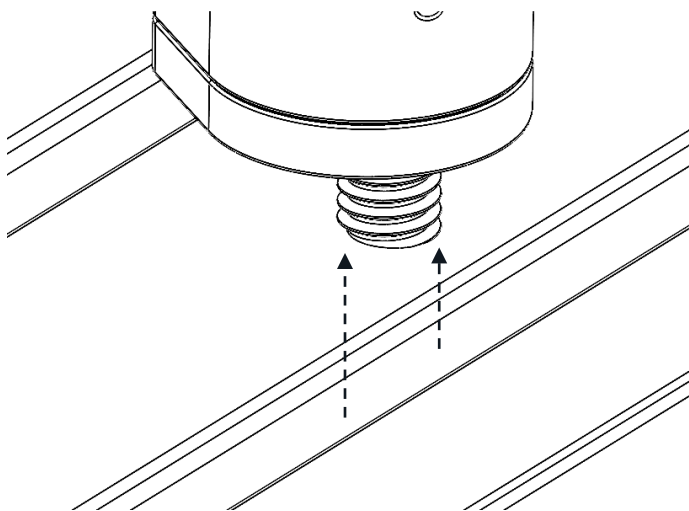

11

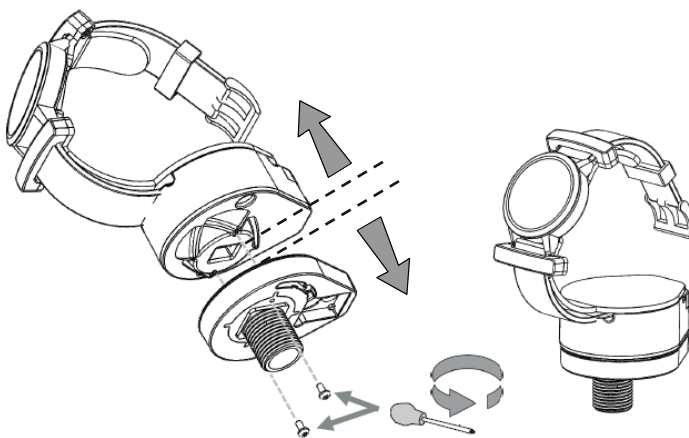


12

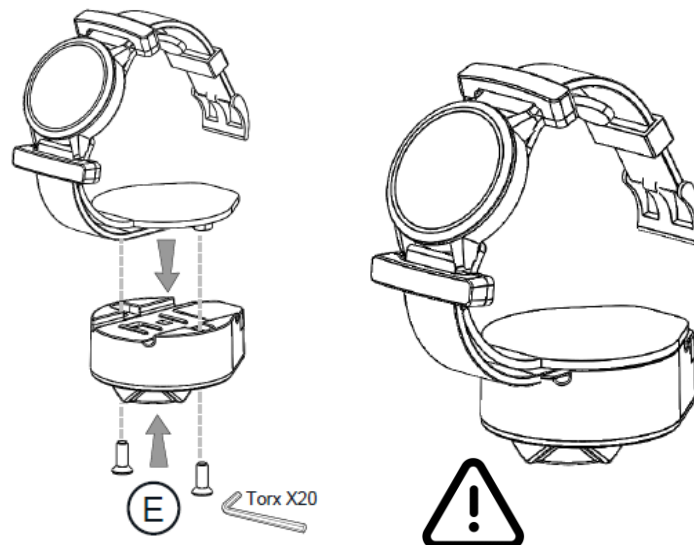


REMOVE EXISTING CRADLE FROM THE
PLASTIC MOULDING SO THAT IT CAN BE
REATTACHED TO GOLD POST IF
REQUIRED


13

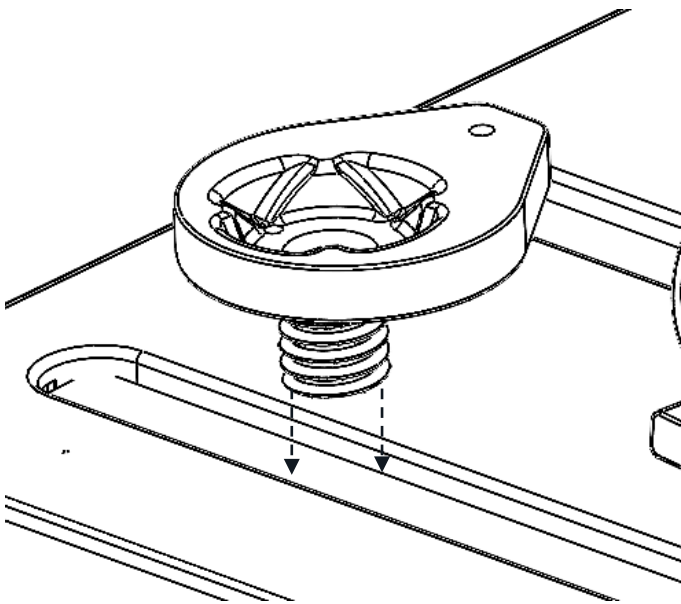


14

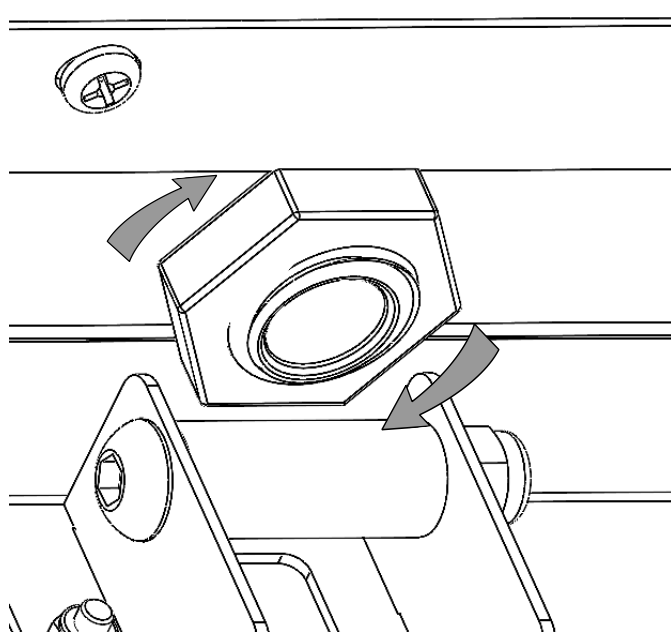


15

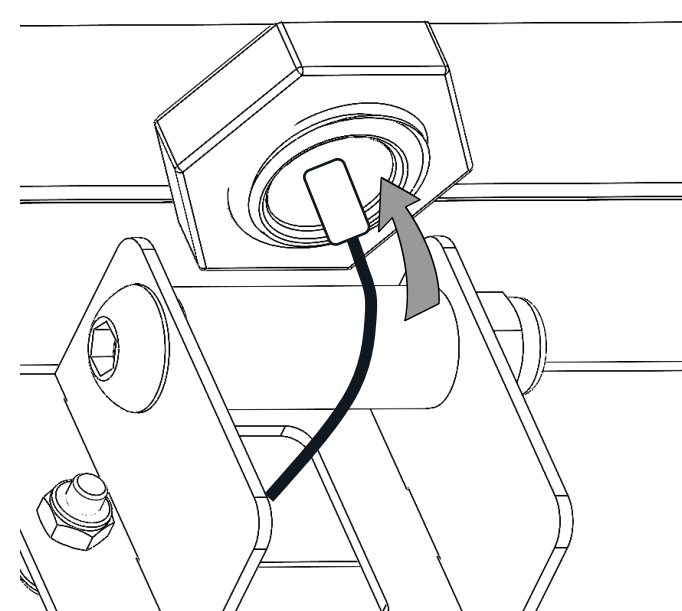


16

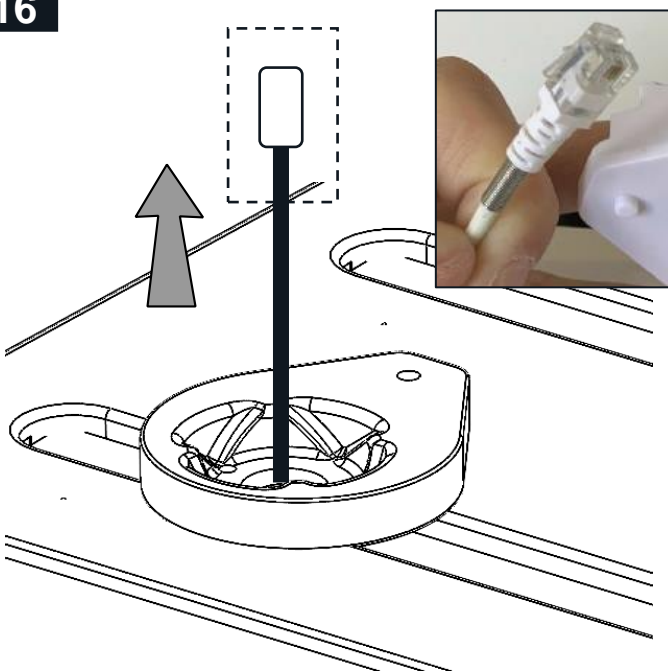



17

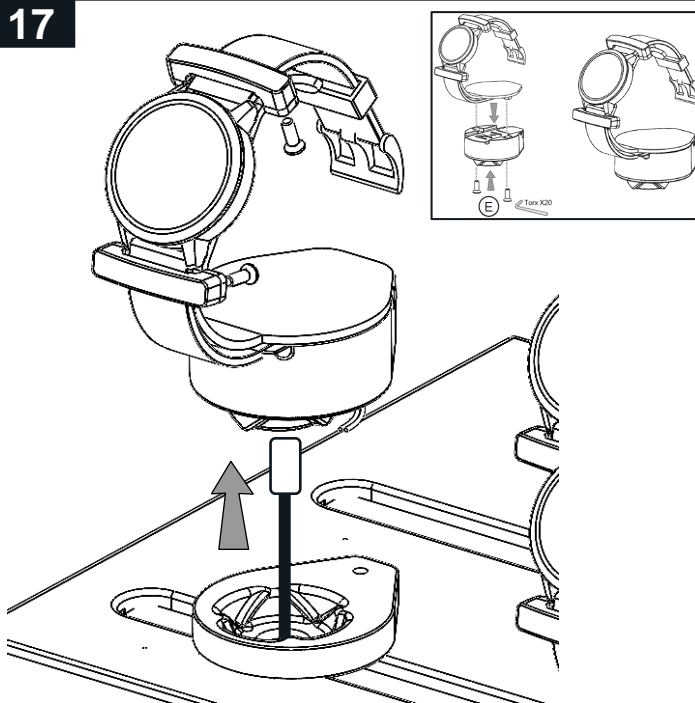



18

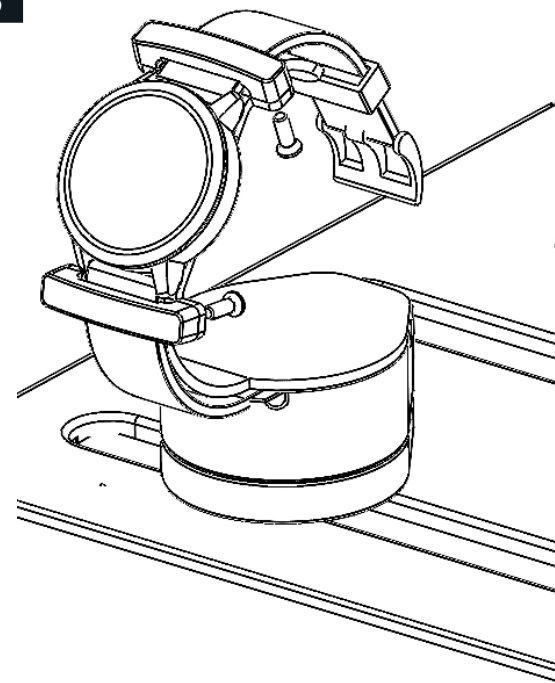


19

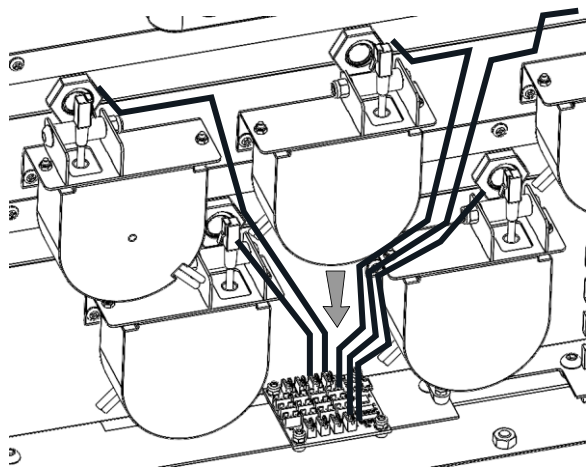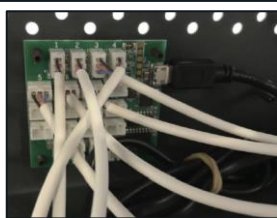



20

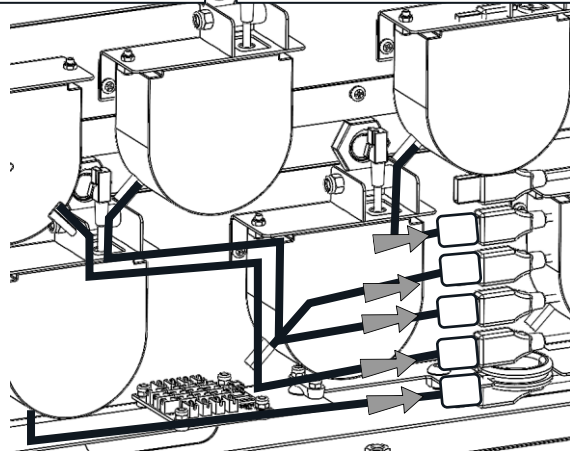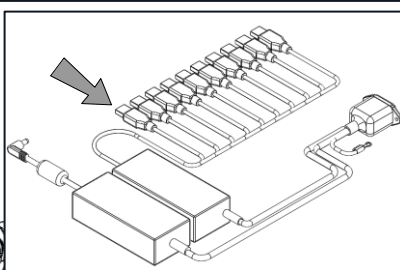


21

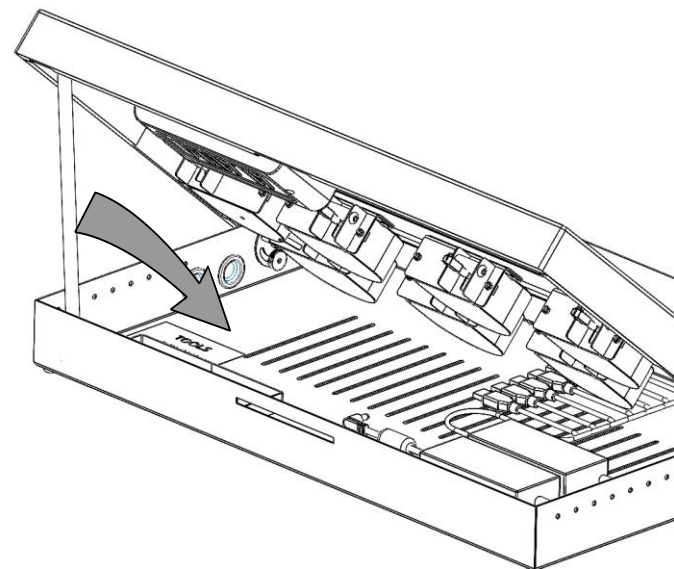


22

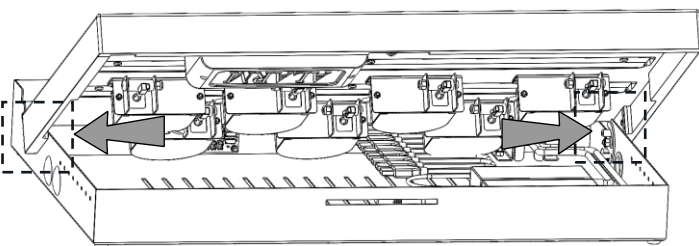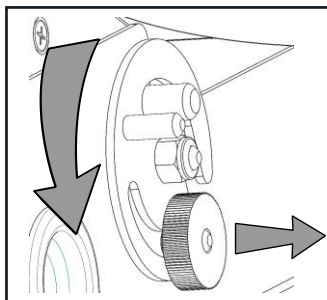


23

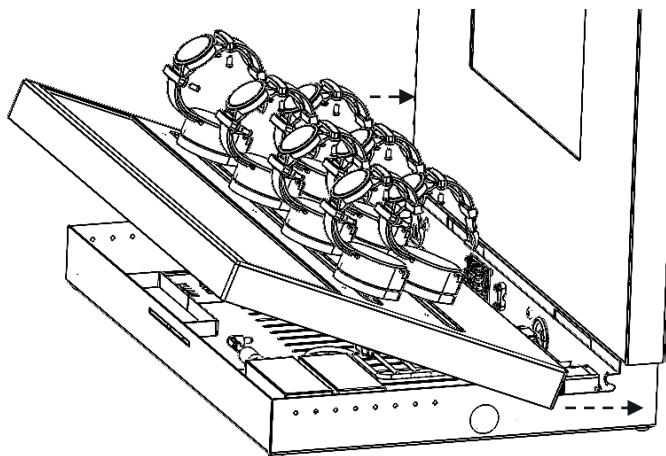


24

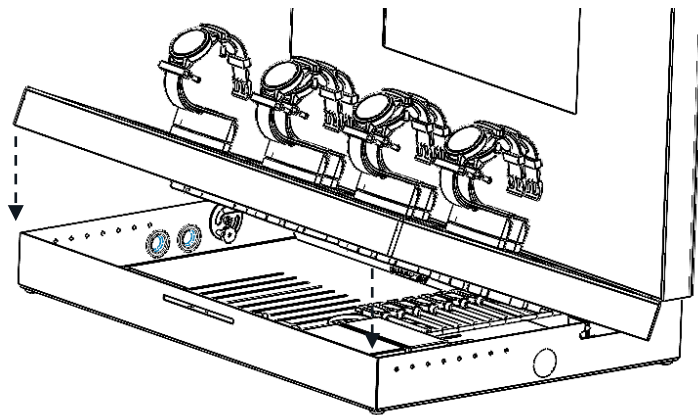


25

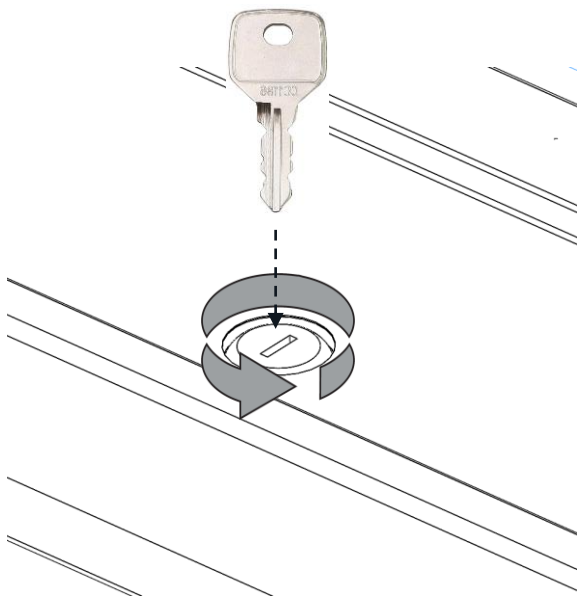

26

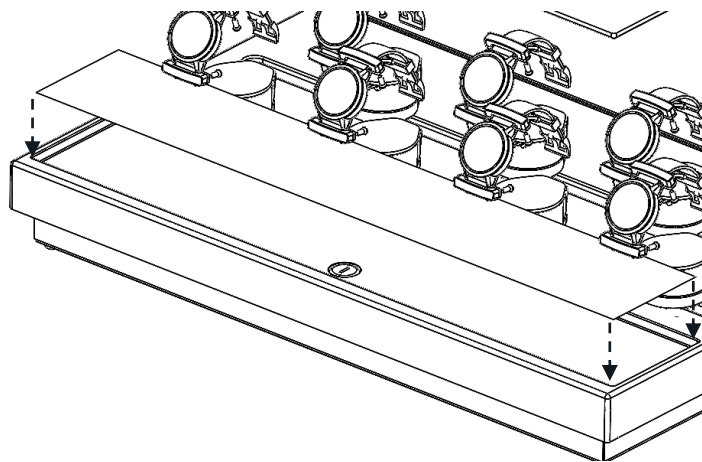


27

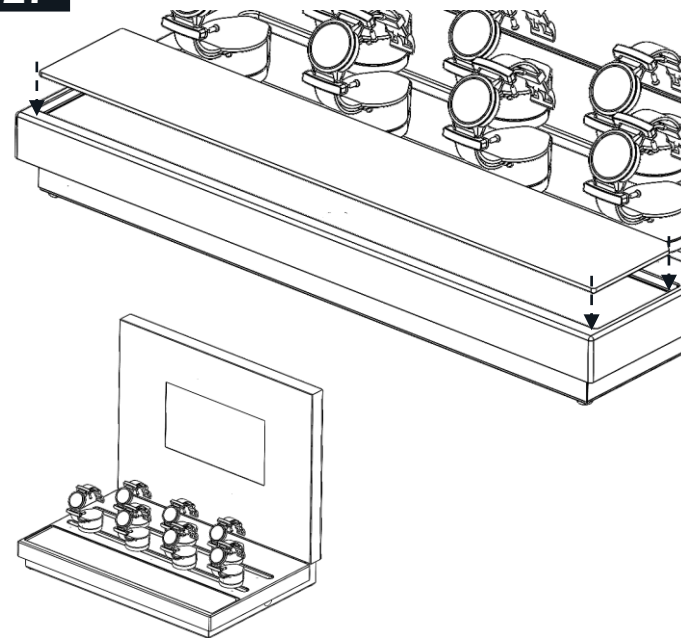

Gold Security
Lift and Learn function
USB-C and power for live products
Positions 1-7 as per below



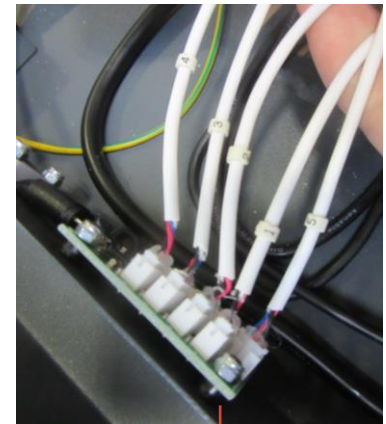

Lift and Learn cables
for PCB board
numbered 1-7

